




PROJECT
SPEC TYPE
NOTES

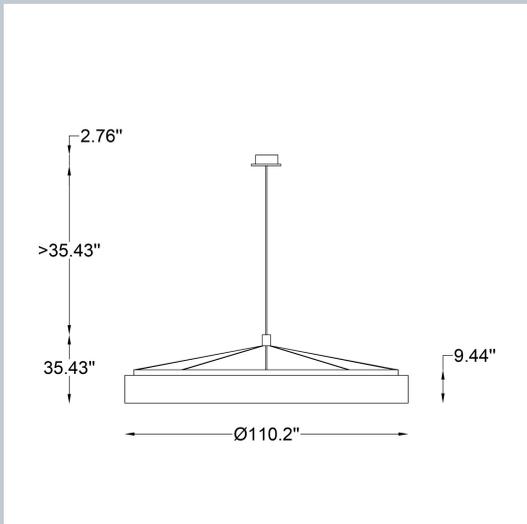

**GENERAL INFORMATION:**

The BUBBLE 3000 RGB DMX Suspended Parallel Cables (WITHOUT JOINT) seamlessly integrates lighting effects with its design, exhibiting a shape that adapts independently to the light beam direction and effortlessly blends into any setting, providing ample room for architectural creativity. The BUBBLE 3000 RGB DMX Suspended Parallel Cables has a size of 110 inches and RGB LED with DMX interface.

**OPTICS:**

Smooth opal polycarbonate diffuser, injection-molded, shock-resistant, and anti-aging.

**FINISHING:**

Mat White

**BODY:**

Round metal frame, seats for the electrical components and anchor points for the suspension device and diffusers.

**VOLTAGE:**

110-277V



**LIGHTING:**

LED RGB



**LIGHTING EFFICIENCY:**

≥ 60 lm/w

**IP RATING:**

20



**APPLIANCE CLASS:**

III



PROJECT
SPEC TYPE
NOTES

HOW TO ORDER:

CODE

Example: C-15SC1-FE-S-D110-7-5-338W-RGB-DMX-E-AE-CS-PS -15SC1

1 LIGHT DISTRIBUTION: -FE

-FE Full Effect



2 INSTALLATION TYPE:

-S Suspended  
-CM Ceiling Mounted

3 CIRCLE DIAMETER: -D110

-D110 110"

4 SIDE PROFILE HEIGHT: -7-5

-7-5 7.5"

5 POWER: -338W

-338W 338 Watts

6 SPECIFY LIGHT SOURCE TYPE: -RGB

-RGB RGB / 10,400 lm





7 CONTROL SYSTEM:

-DMX-E Easy Touch DMX512 controller with outer 9-24V-AC/DC adapter

-DMX-PRO Pro Touch DMX512 programmable controller with outer 5-12V-AC/DC adapter

8 FIXTURE FINISH: -AE

-AE Matt White

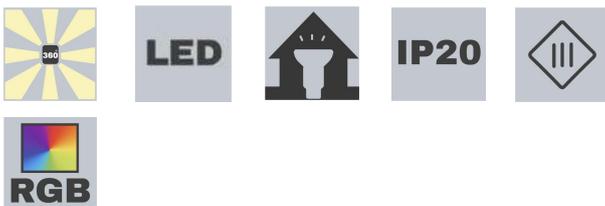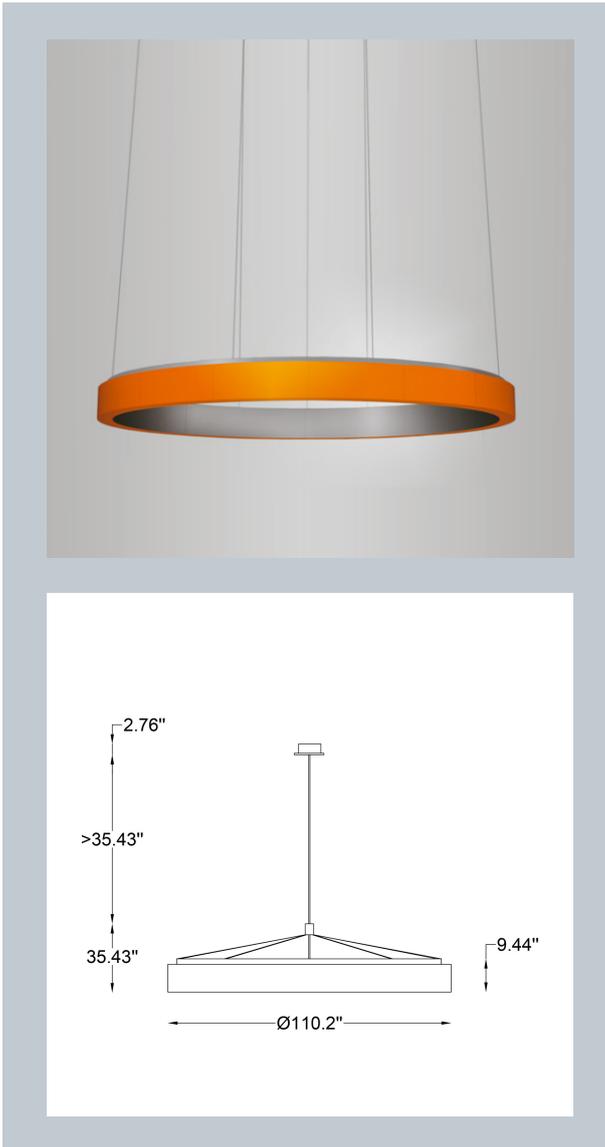

PROJECT
SPEC TYPE
NOTES

HOW TO ORDER:

CODE

Example:  
C-15SC1-FE-S-D110-7-5-338W-RGB-DMX-E-AE-CS-PS

C-15SW1

9 CANOPY OPTIONS:




-CS  
cable  
straight



-NSR  
nexus central  
standard

10 ADDITIONAL ACCESSORY:

-PS ON-OFF power supply designed to mount on a DIN standard profile 120W - Vin = 100~264V-AC 47~63 Hz Vout = 24V

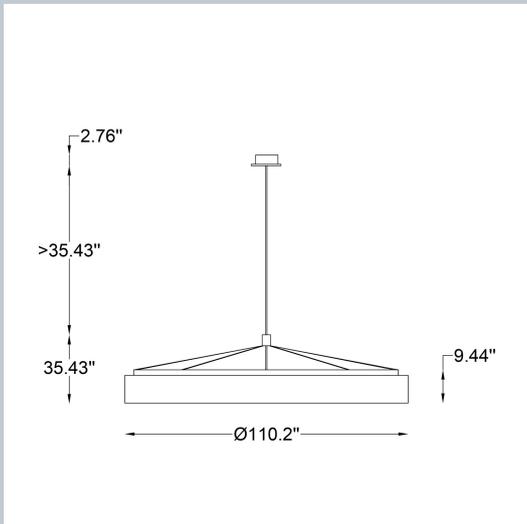

LED



IP20



RGB