



FULL EFFECT

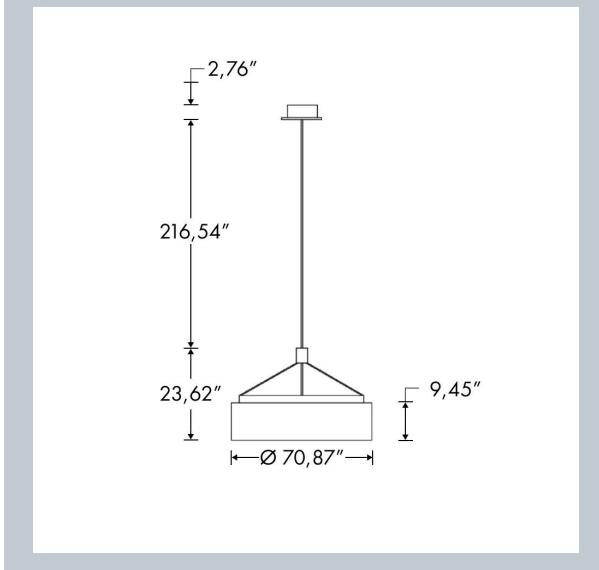

| |
|-----------|
| PROJECT |
| SPEC TYPE |
| NOTES |

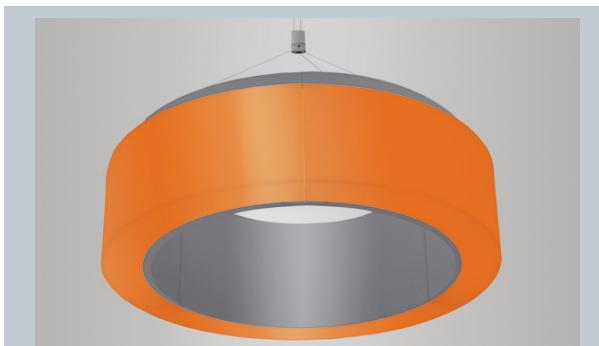

WWW.BULLARDCOLLECTION.COM

OUTDOOR
TECHNICAL
DECORATIVE



WE WELCOME ALL CUSTOM ORDERS



Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646

| | |
|-----------|--|
| PROJECT | |
| SPEC TYPE | |
| NOTES | |

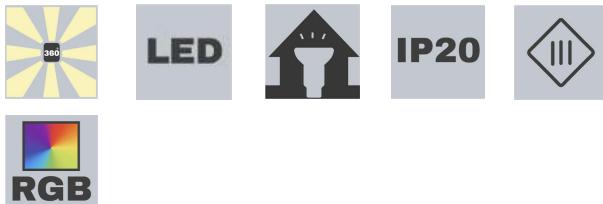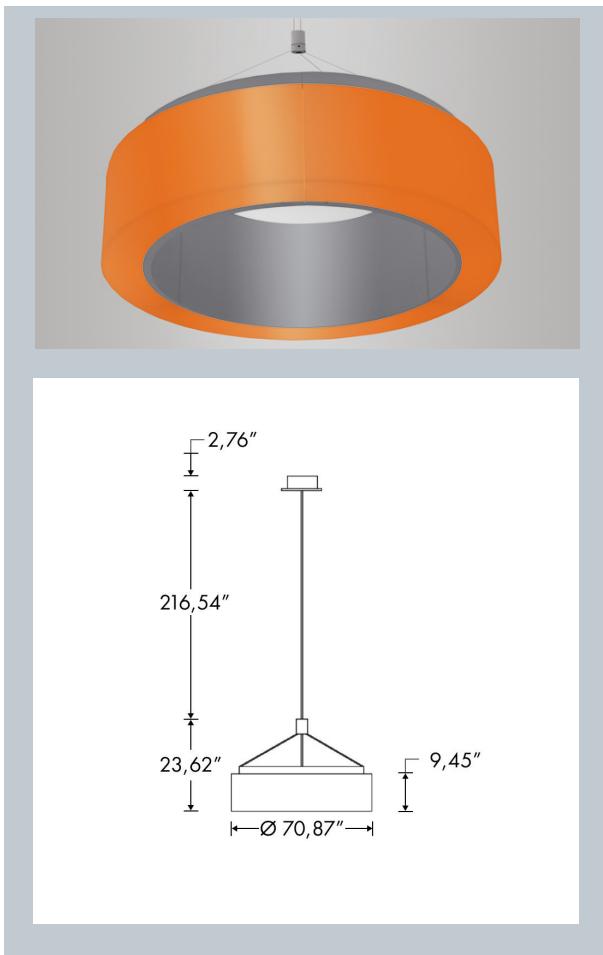

HOW TO ORDER:

CODE

Example: C-15SC1-FE-S-D70-7-5-225W-RGB-DMX-E-AE-CS-PS

1 LIGHT DISTRIBUTION: -FE Full Effect 

2 INSTALLATION TYPE: -S Suspended

3 CIRCLE DIAMETER: -D70 70"

4 SIDE PROFILE HEIGHT: -7-5 7.5"

5 POWER: -225W 225 Watts



6 SPECIFY LIGHT SOURCE TYPE: -RGB RGW / 6,912 lm 

7 CONTROL SYSTEM:

- DMX-E Easy Touch DMX512 controller with outer 9-24V-AC/DC adapter
- DMX-PRO Pro Touch DMX512 programmable controller with outer 5-12V-AC/DC adapter

8 FIXTURE FINISH: -AE Matt White

| | |
|-----------|--|
| PROJECT | |
| SPEC TYPE | |
| NOTES | |

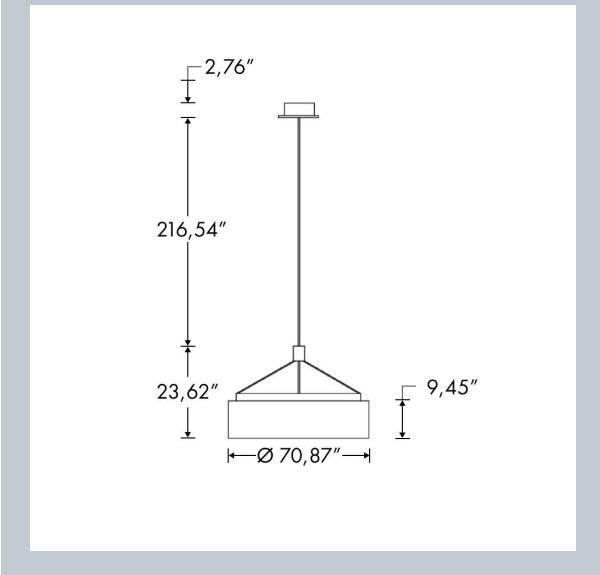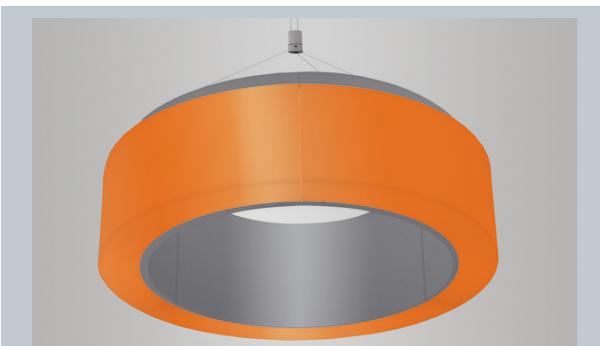

1

HOW TO ORDER:


CODE

Example:

C-15SC1-FE-S-D70-7-5-225W-RGB-DMX-E-AE-CS-PS

C-15SW1

9 CANOPY OPTIONS:



-CS
cable
straight



-NSR
nexus central
standard

10 ADDITIONAL ACCESSORY:

-PS ON-OFF power supply designed to mount on
a DIN standard profile 120W - Vin =
100~264V-AC 47~63 Hz Vout = 24V