




BUBBLE 1800 STABLE WHITE (STANDARD GRADE)

FULL EFFECT



PROJECT
SPEC TYPE
NOTES

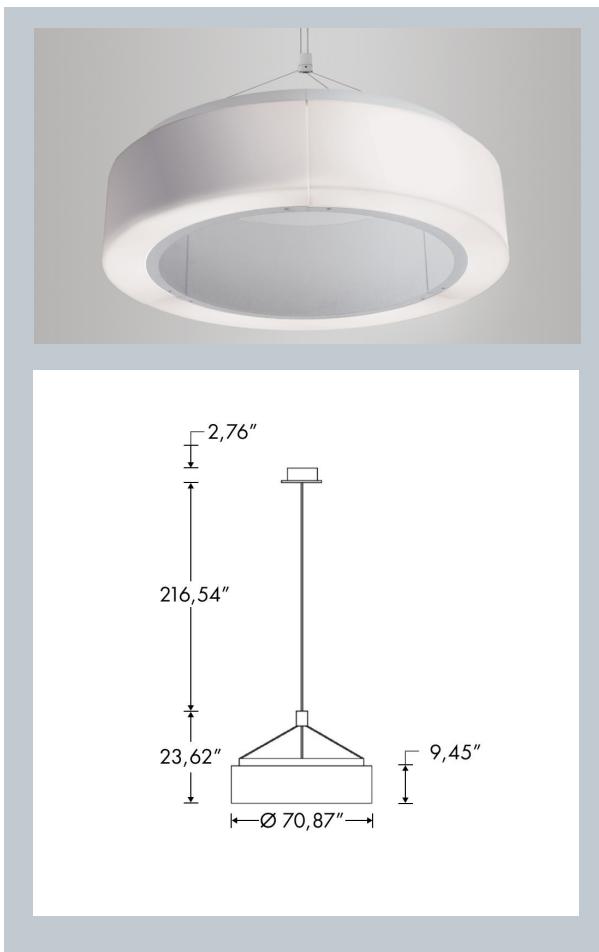

GENERAL INFORMATION:

The BUBBLE 1800 STABLE WHITE seamlessly integrates lighting effects with its design, exhibiting a shape that adapts independently to the light beam direction and effortlessly blends into any setting, providing ample room for architectural creativity.

The BUBBLE 1800 STABLE WHITE has a size of 70 inches and two color temperatures to choose from: 3000K and 4000K with full effect lighting.

OPTICS:

Smooth opal polycarbonate diffuser, injection-molded, shock-resistant, and anti-aging.

FINISHING:

Matt White

BODY:

Round metal frame, seats for the electrical components and anchor points for the suspension device and diffusers.

VOLTAGE:

110-277V



LIGHTING:

LED



LIGHTING EFFICIENCY:

≥ 60 lm/w

IP RATING:

20




APPLIANCE CLASS:

I



PROJECT	
SPEC TYPE	
NOTES	

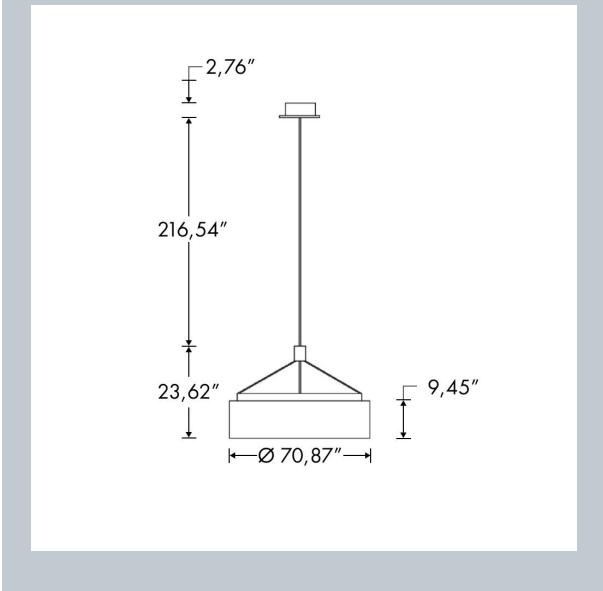

HOW TO ORDER:

CODE

Example: C-15SL1-FE-S-D70-7-5-291W-80-30K-DL-AE-CS-RE

C-15SL1

1 LIGHT DISTRIBUTION:

-FE Full Effect 

2 INSTALLATION TYPE:

-S Suspended

3 CIRCLE DIAMETER:

-D70 70"

4 SIDE PROFILE HEIGHT:

-7-5 7.5"

5 POWER:

-291W 291Watts

6 LED CRI:

-80 CRI 80

7 SPECIFY CCT AND LIGHT EMISSION:

-30K 3000K/15,350lm

-40K 4000K/16,500lm

8 DIMMING OPTION:


-STD Non-Dimmable

-DL DALI

9 FIXTURE FINISH:

-AE Matt White

PROJECT	
SPEC TYPE	
NOTES	

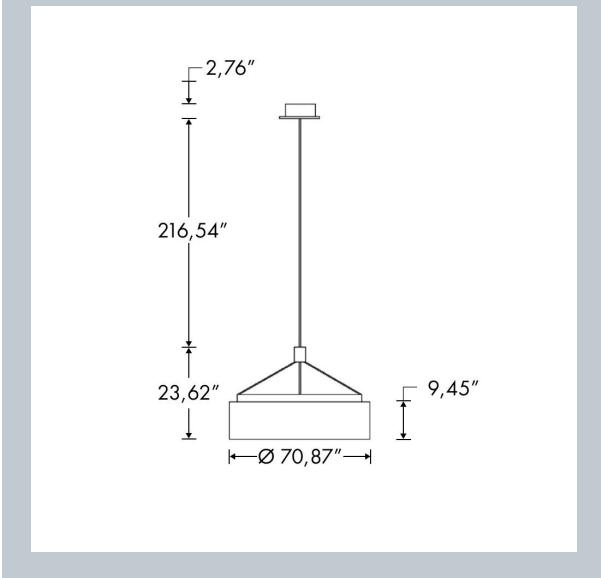


HOW TO ORDER:

CODE


Example:
C-15SL1-FE-S-D70-7-5-291W-80-30K-DL-AE-CS-RE

C-15SL1

10 CANOPY OPTIONS:



-CS
cable
straight



-NSR
nexus central
standard

11 ADDITIONAL FEATURES:

- RE** Remote Emergency
- OS** Occupancy Sensor
- DS** Daylight Sensor / Light Harvesting

* E.G.: RE = Remote Emergency