




BUBBLE 1000 TUNABLE WHITE (STANDARD GRADE)

FULL EFFECT



PROJECT
SPEC TYPE
NOTES

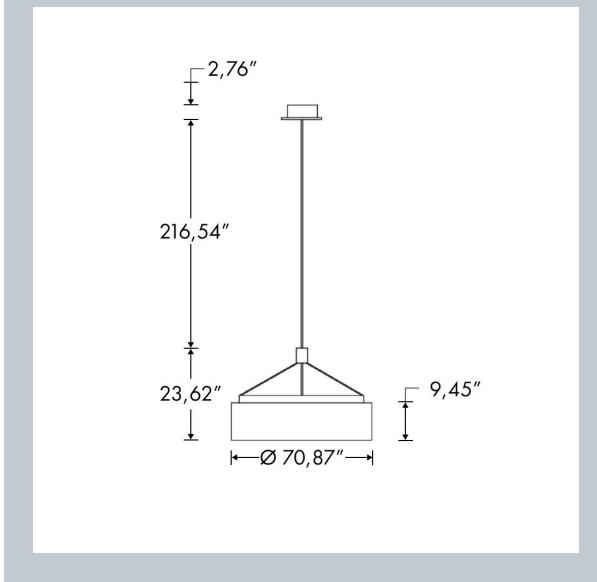

GENERAL INFORMATION:

The BUBBLE 1800 TUNABLE WHITE seamlessly integrates lighting effects with its design, exhibiting a shape that adapts independently to the light beam direction and effortlessly blends into any setting, providing ample room for architectural creativity.

The Bubble 1800 TUNABLE WHITE has a size of 70 inches and tunable white LED system with color temperature range from 2700K to 6500K with full effect lighting.

OPTICS:

Smooth opal polycarbonate diffuser, injection-molded, shock-resistant, and anti-aging.

FINISHING:

Matt White

BODY:

Round metal frame, seats for the electrical components and anchor points for the suspension device and diffusers.

VOLTAGE:

110-277V



LIGHTING:

LED



LIGHTING EFFICIENCY:

≥ 60 lm/w

IP RATING:

20




APPLIANCE CLASS:

I



PROJECT	
SPEC TYPE	
NOTES	

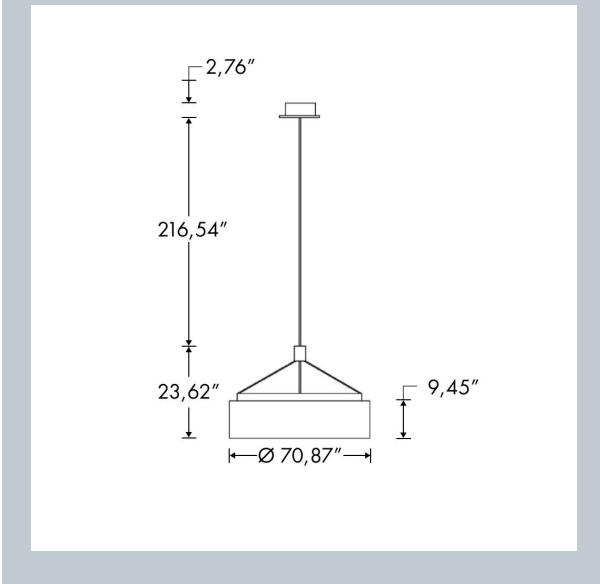

HOW TO ORDER:

CODE

Example:
C-15SW1-FE-S-D70-5-291W-80-TW-DL-AE-CS-DDR

C-15SW1

1 LIGHT DISTRIBUTION:

-FE

-FE Full Effect



2 INSTALLATION TYPE:

-S

-S Suspended

3 CIRCLE DIAMETER:

-D70

-D70 70"

4 SIDE PROFILE HEIGHT:

-7-5

-7-5 7.5"

5 POWER:

-291W

-291W 291Watts

6 LED CRI:

-80

-80 CRI 80

7 SPECIFY CCT AND LIGHT EMISSION:

-TW

-TW Tunable White: 2700K-6500K / 16,500 lm

8 DIMMING OPTION:

-DL


-DL DALI

9 FIXTURE FINISH:

-AE

-AE Matt White

PROJECT	
SPEC TYPE	
NOTES	

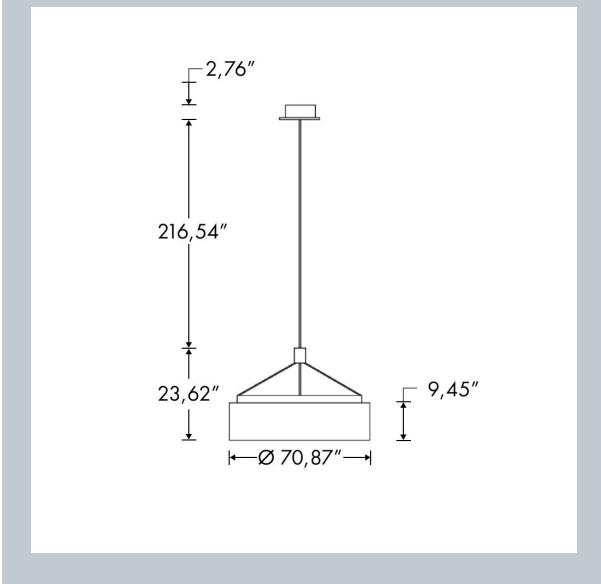


HOW TO ORDER:

CODE

Example:
C-15SW1-FE-S-D70-5-291W-80-TW-DL-AE-CS-DDR

C-15SW1

10 CANOPY OPTIONS:



-CS
cable
straight



-NSR
nexus central
standard

11 ADDITIONAL ACCESSORIES:

-DDPH Dimming DALI Kit (Wireless receivers unit + portable hand transmitter).

-DPT Dimming DALI Kit (Wireless receivers unit + portable table /wall transmitter with integrated light sensor).

-DDR Dimming DALI Kit (Remote Controller via push-button for multi luminaires installation).