



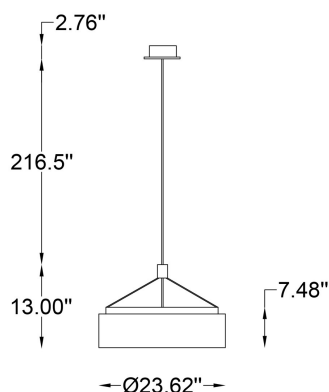

PROJECT

SPEC TYPE

NOTES

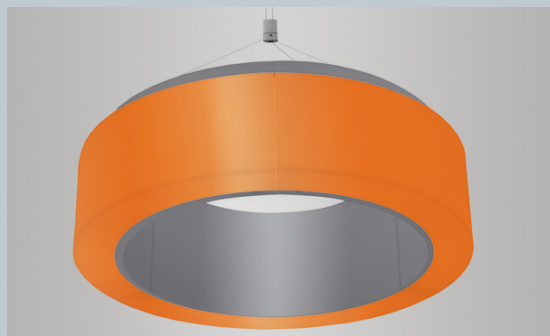

LED



IP20



GENERAL INFORMATION:

The BUBBLE 600 RGB DMX seamlessly integrates lighting effects with its design, exhibiting a shape that adapts independently to the light beam direction and effortlessly blends into any setting, providing ample room for architectural creativity.

The BUBBLE 600 RGB DMX has a size of 23 inches and RGB LED with DMX interface.

OPTICS:

Smooth opal polycarbonate diffuser, injection-molded, shock-resistant, and anti-aging.

FINISHING:

Matt White

BODY:

Round metal frame, seats for the electrical components and anchor points for the suspension device and diffusers.

VOLTAGE:

110-277V



LIGHTING:

LED RGB



LIGHTING EFFICIENCY:

≥ 60 lm/w

IP RATING:

20

IP20

APPLIANCE CLASS:

III



PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE

Example:

C-15SC1-FE-S-D24-7-5-55W-RGB-DMX-E-AE-CS-PS

C-15SC1

1 LIGHT DISTRIBUTION:

-FE Full Effect



- FE

2 INSTALLATION TYPE:

-S Suspended

-S

3 CIRCLE DIAMETER:

-D24 24"

- D24

4 SIDE PROFILE HEIGHT:

-7-5 7.5"

- 7-5

5 POWER:

-59W 59 Watts

- 59W

6 SPECIFY LIGHT SOURCE TYPE:

-RGB RGW / 1,728 lm



-RGB

7 CONTROL SYSTEM:


-DMX-E Easy Touch DMX512 controller with outer 9-24V-AC/DC adapter

-DMX-PRO Pro Touch DMX512 programmable controller with outer 5-12V-AC/DC adapter

8 FIXTURE FINISH:

-AE Matt White

-AE

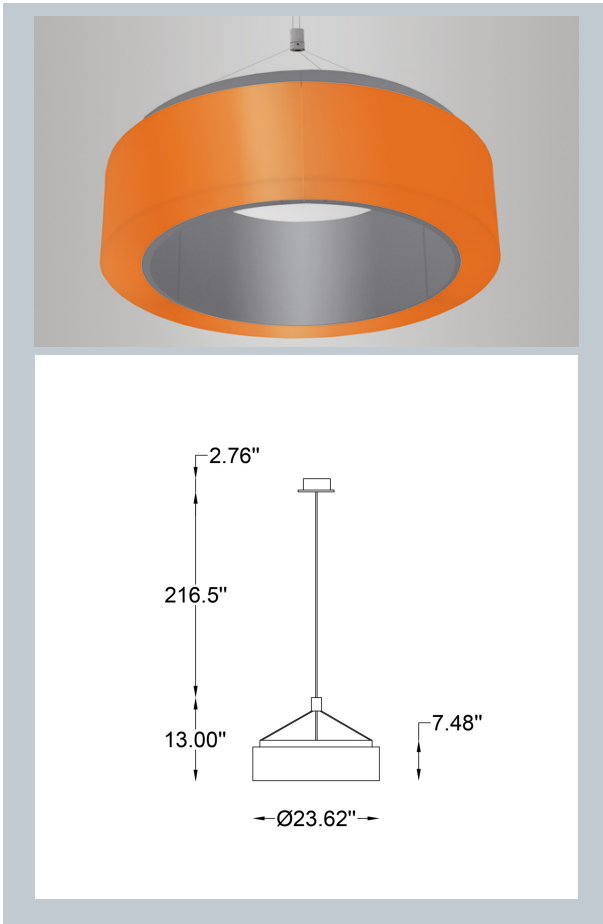

LED



IP20



PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:


CODE

Example:

C-15SC1-FE-S-D24-7-5-55W-RGB-DMX-E-AE-CS-PS

C-15SW1

9 CANOPY OPTIONS:




-CS
cable
straight



-NSR
nexus central
standard

10 ADDITIONAL ACCESSORY:

-PS ON-OFF power supply designed to mount on a DIN standard profile 120W - Vin = 100~264V-AC 47~63 Hz Vout = 24V

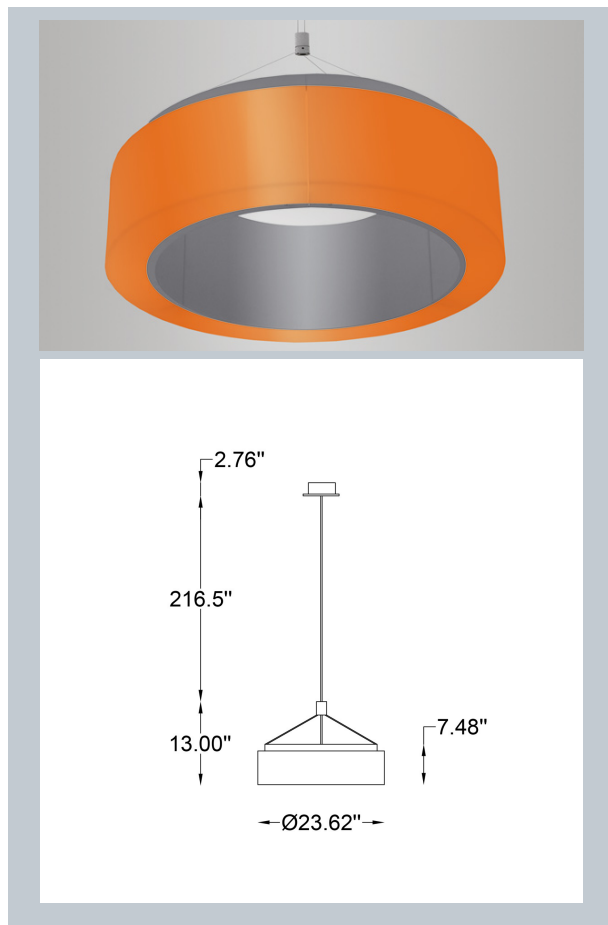

LED



IP20



WWW.BULLARDCOLLECTION.COM

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646