

CAPO 2 ACOUSTIC SURFACE MOUNTED (STANDARD GRADE)


BEAM IN AND OUT



PROJECT

SPEC TYPE

NOTES

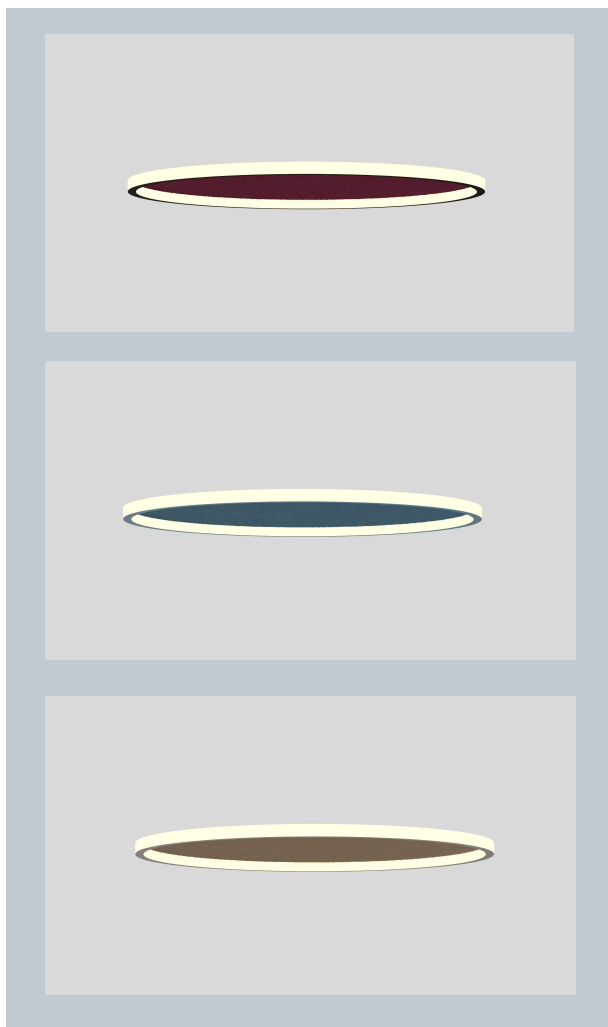

LED



IP44



GENERAL INFORMATION:

Introducing CAPO 2 ACOUSTIC SURFACE MOUNTED: Elevate Your Lighting Experience. Discover the innovative CAPO 2 ACOUSTIC SURFACE MOUNTED circle light, available in acoustic lighting options. Choose from two elegant color finishes (black and white), with customization possible. Enjoy efficient operation with AC110-277V voltage and select 0-10v dimming or non-dimmable options. With an impressive selection of 38 acoustic felt colors, you can create a space that resonates with both light and sound. CAPO 2 ACOUSTIC SURFACE MOUNTED offers a unparalleled value cost proposition in 5 standard sizes ranging from 11 to 47 inch diameters. Lighting from 2700K to 5000K.

OPTICS:

PMMA lenses, Anti-UV Operation

FINISHING:

Matt White, Matt Black, custom on request

BODY:

PMMA lenses, Anti-UV Operation

VOLTAGE:

110-277V



LIGHTING:

LED

LED

LIGHTING EFFICIENCY:

≥ 70 lm/w

IP RATING:

44

IP44

APPLIANCE CLASS:

I



WWW.BULLARDCOLLECTION.COM

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE

Example:
NS-LL0213AC-DI-SM-D11-07-0-8-32W-80-27K-DIM-SW-RE-NSAC-013111

NS-LL0213AC

1 LIGHT DISTRIBUTION:

-DI

-DI Direct / Indirect



2 INSTALLATION TYPE:

-SM

-SM Surface Mounted

3 CIRCLE DIAMETER:

CODE = RING DIAMETER | H

CODE = RING DIAMETER | H

-D11-07 11.8" (30cm) 1,78"

-D11-1 11.8" (30cm) 2,16"

-D15-07 15.7" (40cm) 1,78"

-D15-1 15.7" (40cm) 2,16"

-D23-07 23.6" (60cm) 1,78"

-D23-1 23.6" (60cm) 2,16"

-D35-07 35.4" (90cm) 1,78"

-D35-1 35.4" (90cm) 2,16"

-D47-07 47.2" (120cm) 1,78"

-D47-1 47.2" (120cm) 2,16"

4 SIDE PROFILE HEIGHT:

-0-8

-0-8 0.8"

5 POWER AND LIGHT EMISSION:

CODE = WATTS | Ø

DIRECT LUMENS

-32W 11" 2,240 lm

-45W 15" 3,150 lm

-60W 23" 4,200 lm

-100W 35" 7,000 lm

-135W 47" 9,450 lm

*E.G : 32W = 32 total Watts

6 LED CRI:

-80 CRI 80

-90 CRI 90

7 SPECIFY CCT:


-27K 2700K

-35K 3500K

-30K 3000K

-40K 4000K

-50K 5000K

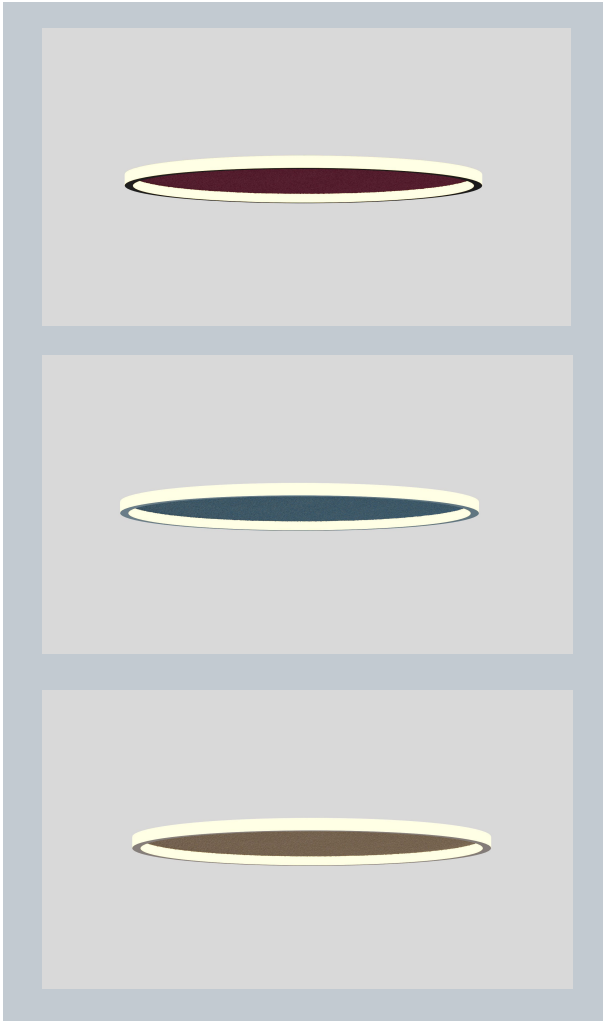

LED



IP44



PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE

Example:
NS-LL0213AC-DI-SM-D11-07-0-8-32W-80-27K-DIM-SW-RE-NSAC-013111

NS-LL0213AC

8 DIMMING OPTION:

- STD Non-Dimmable
- DIM 1-10V

9 FIXTURE FINISH:


- SW Matt White
- SB Matt Black
- RAL Custom RAL on request*

* E.G. : RAL = #3020

10 ADDITIONAL FEATURES:

- RE Remote Emergency
- OS Occupancy Sensor
- DS Daylight Sensor/Light Harvesting

* E.G. : RE = Remote Emergency

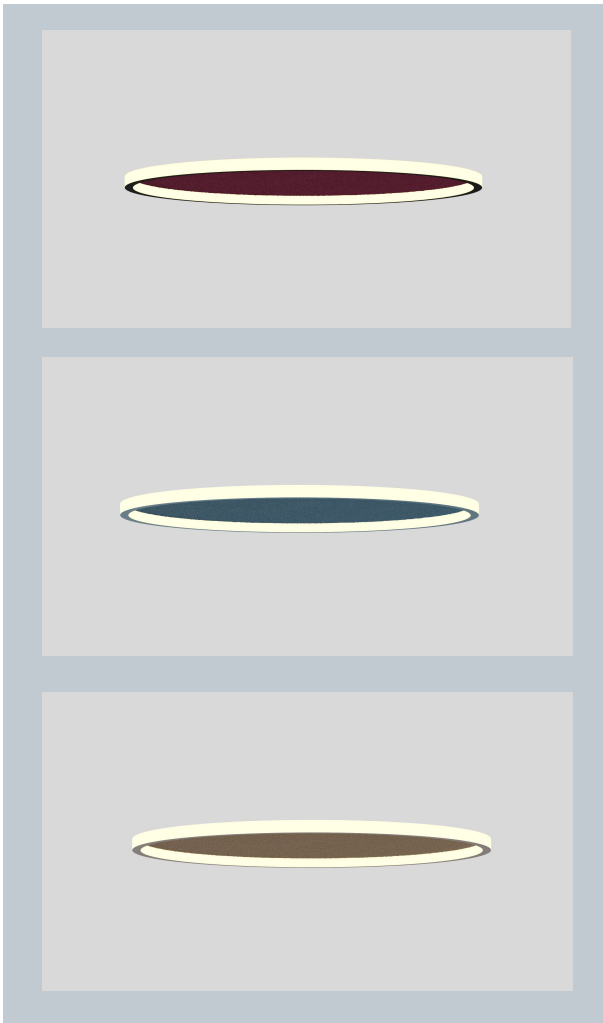

LED



IP44



WWW.BULLARDCOLLECTION.COM

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

Contact Us:

sales@gordonbullard.com


www.cerchiolighting.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

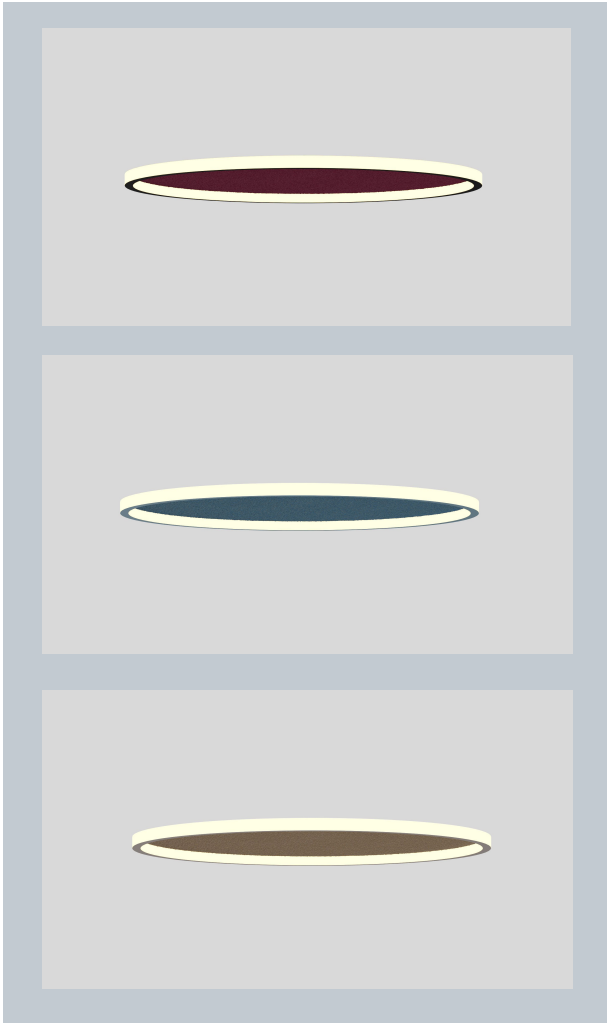

HOW TO ORDER:

CODE

Example:
NS-LL0213AC-DI-SM-D11-07-0-8-32W-80-27K-DIM-SW-RE-NSAC-013111

NS-LL0213AC

11	ACOUSTIC COLORS:				
	-NSAC-001141		-NSAC-013111		-NSAC-025138
	-NSAC-002122		-NSAC-018125		-NSAC-038127
	-NSAC-003120		-NSAC-019126		-NSAC039143
	-NSAC-004123		-NSAC-016104		-NSAC-028110
	-NSAC-005107		-NSAC-017147		-NSAC-029112
	-NSAC-006106		-NSAC-022119		-NSAC-042-146
	-NSAC-007145		-NSAC-031108		-NSAC-043115
	-NSAC-008129		-NSAC-020128		-NSAC-036105
	-NSAC-009140		-NSAC-021130		-NSAC-033103
	-NSAC-014144		-NSAC-034102		-NSAC-040124
	-NSAC-011135		-NSAC-035101		-NSAC-044114
	-NSAC-012133		-NSAC-024117		