




PROJECT

SPEC TYPE

NOTES

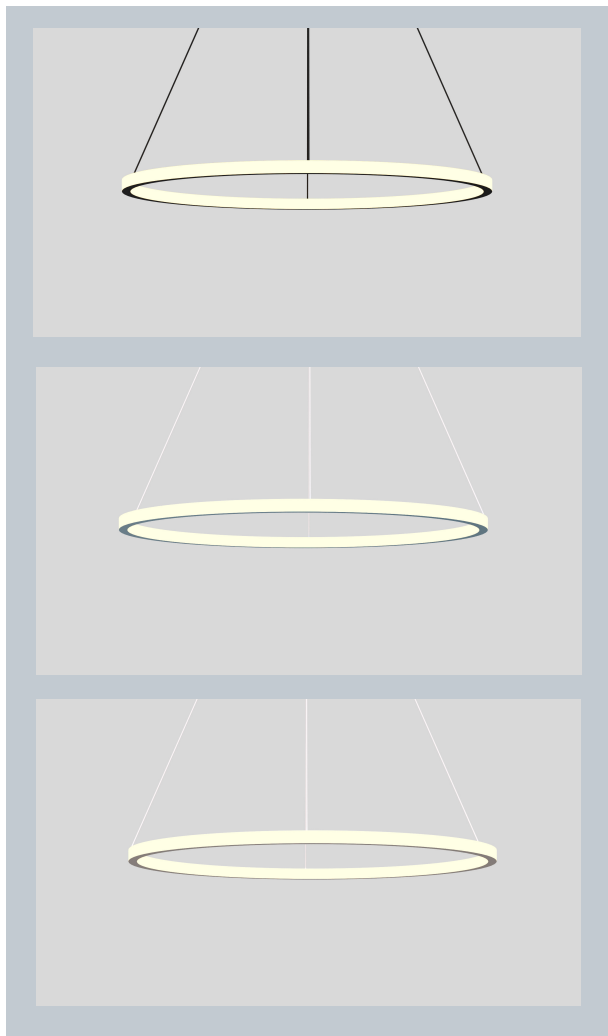

GENERAL INFORMATION:

CAPO 2 SINGLE FIXTURE - STANDARD GRADE offers a unparalleled value cost proposition in 5 standard sizes ranging from 12 to 48 inch diameters. Direct and indirect lighting from 2700K to 4000K . Offering two standard canopy and mounting options. Housing is full aluminum construction with both standard powder coating in black or white as well as custom RAL options. Complete Collection offers optional Emergency Back up kits, Motion, Occupancy, and Light harvesting control interfaces.

OPTICS:

PMMA lenses, Anti-UV Operation

FINISHING:

Matt White, Matt Black, custom on request

BODY:

Aluminum body construction.

VOLTAGE:

110-277V



LIGHTING:

LED



LIGHTING EFFICIENCY:

$\geq 70 \text{ lm/w}$

IP RATING:

44



APPLIANCE CLASS:

I



WWW.BULLARDCOLLECTION.COM

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646

| |
|-----------|
| PROJECT |
| SPEC TYPE |
| NOTES |



HOW TO ORDER:

CODE

Example:
NS-NS-LL0213A-DI-S-D24-0-7-60W-80-27K-DIM-SW-CS

NS-LL0213A

1 LIGHT DISTRIBUTION:

-DI

-DI DIRECT/INDIRECT



2 INSTALLATION TYPE:

-S

-S Suspended

3 CIRCLE DIAMETER:

| | | | |
|------|-----|------|-----|
| -D12 | 12" | -D36 | 36" |
| -D16 | 16" | -D48 | 48" |
| -D24 | 24" | | |

4 SIDE PROFILE HEIGHT:

-0-7

-0-7 0.7"

5 POWER AND LIGHT EMISSION:

CODE = TOTAL WATTS | Ø

LUMENS | WATTS

| | | |
|-------|-----|---------------|
| -32W | 12" | 2,240 lm/32W |
| -45W | 16" | 3,150 lm/45W |
| -60W | 24" | 4,200 lm/60W |
| -100W | 36" | 7,000 lm/100W |
| -135W | 48" | 9,450 lm/135W |

*E.G : 60W = 60 total Watts


6 LED CRI:

| | |
|-----|--------|
| -80 | CRI 80 |
| -90 | CRI 90 |

7 SPECIFY CCT:

| | | | |
|------|-------|------|-------|
| -27K | 2700K | -35K | 3500K |
| -30K | 3000K | -40K | 4000K |

| |
|-----------|
| PROJECT |
| SPEC TYPE |
| NOTES |

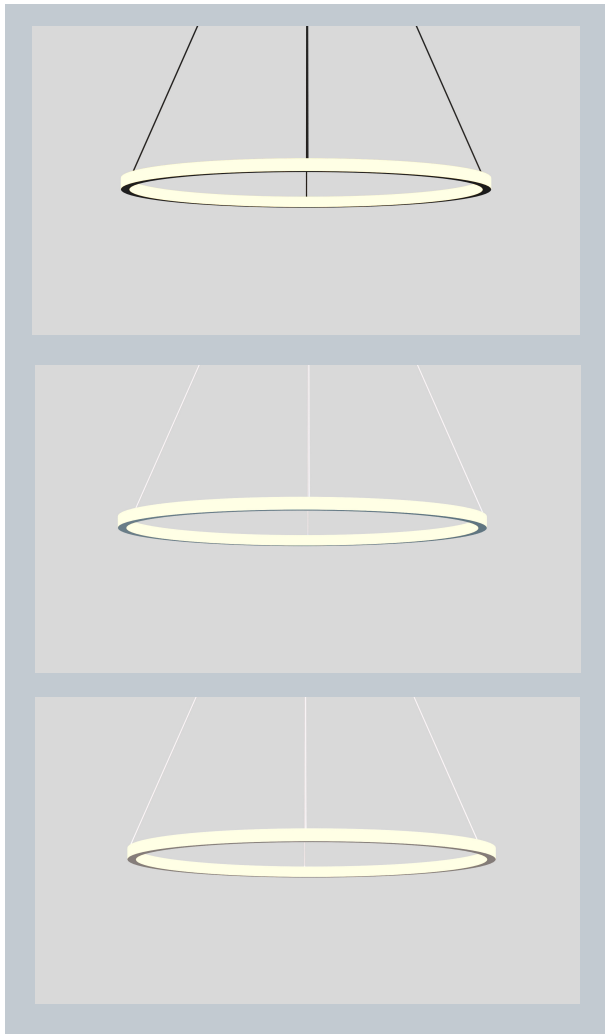

HOW TO ORDER:

CODE

8 DIMMING OPTION:

- STD Non-Dimmable
- DIM 1-10V

9 FIXTURE FINISH:


- SW Matt White
- SB Matt Black
- RAL Custom RAL on request*

* E.G. : RAL = #3020

10 CANOPY OPTIONS:



CS
cable
straight



CSS
central
standard

11 ADDITIONAL FEATURES:

- RE Remote Emergency
- OS Occupancy Sensor
- DS Daylight Sensor/Light Harvesting

* E.G. : RE = Remote Emergency