




PROJECT
SPEC TYPE
NOTES

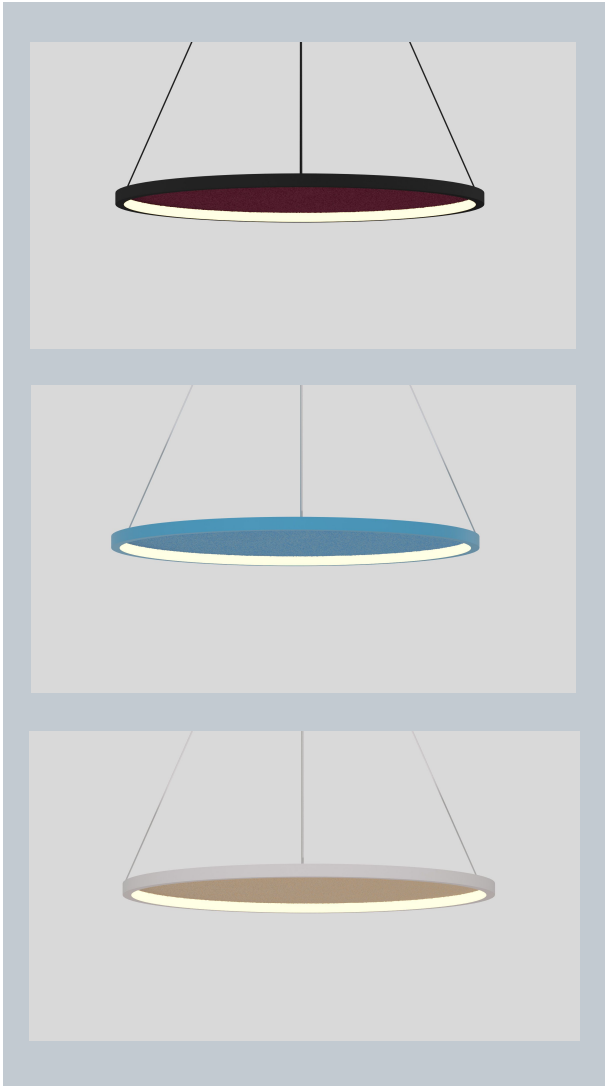

GENERAL INFORMATION:

Introducing CAPO IN ACOUSTIC SINGLE FIXTURE: Elevate Your Lighting Experience. Discover the innovative CAPO IN ACOUSTIC SINGLE FIXTURE circle light, available in acoustic lighting options. Choose from two elegant color finishes (black and white), with customization possible. Enjoy efficient operation with AC110-277V voltage and select 0-10v dimming or non-dimmable options.

With an impressive selection of 38 acoustic felt colors, you can create a space that resonates with both light and sound.

CAPO IN ACOUSTIC SINGLE FIXTURE offers a unparalleled value cost proposition in 5 standard sizes ranging from 23 to 59 inch diameters. Lighting from 2700K to 5000K.

OPTICS:

PMMA lenses, Anti-UV Operation

FINISHING:

Matt White, Matt Black, custom on request

BODY:

Aluminum body construction.

VOLTAGE:

110-277V



LIGHTING:

LED



LIGHTING EFFICIENCY:

≥ 70 lm/w

IP RATING:

44




APPLIANCE CLASS:

I



PROJECT
SPEC TYPE
NOTES

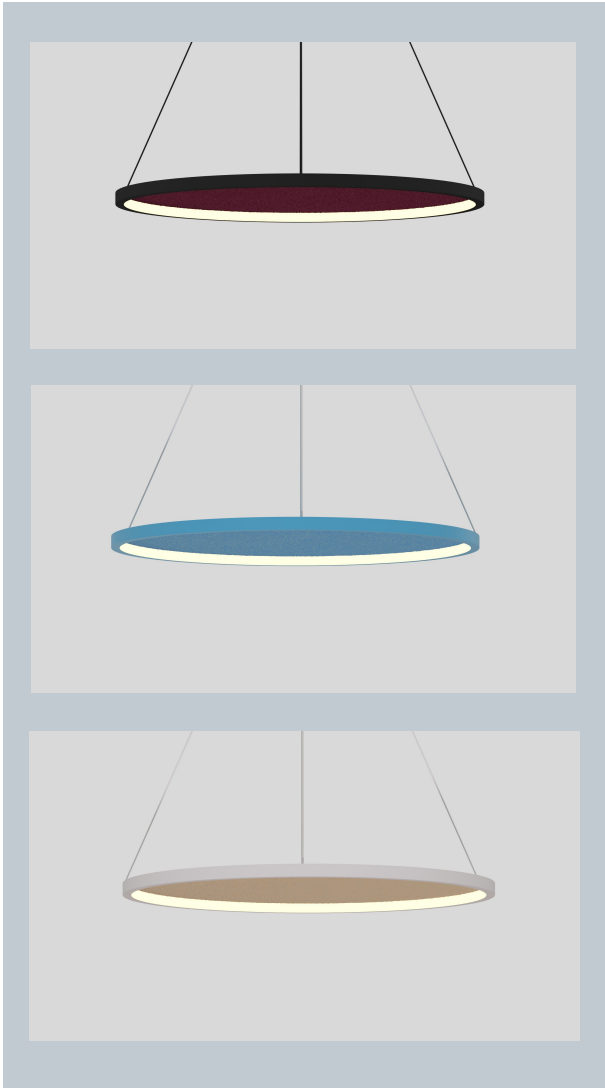

HOW TO ORDER:

CODE

Example: NS-LL0125AC-I-S-D23-0-8-32W-80-27K-DIM-SW-CS-RE-NSAC-013111 NS-LL0125AC

1 LIGHT DISTRIBUTION: -I

-I Indirect

2 INSTALLATION TYPE: -S

-S Suspended

3 CIRCLE DIAMETER:

CODE = RING DIAMETER | H

- D23 23.6" (60cm)
- D35 35.4" (90cm)
- D47 47.2" (120cm)
- D59 59.1" (150cm)

4 SIDE PROFILE HEIGHT: -0-8

-0-8 0.8"

5 POWER AND LIGHT EMISSION:

CODE = WATTS | Ø DIRECT LUMENS

- | | | |
|------|-----|----------|
| -32W | 23" | 2,240 lm |
| -40W | 35" | 2,800 lm |
| -70W | 47" | 4,900 lm |
| -80W | 59" | 5,600 lm |

*E.G : 32W = 32 total Watts

6 LED CRI:

- 80 CRI 80
- 90 CRI 90

7 SPECIFY CCT:

- | | | | |
|------|-------|------|-------|
| -27K | 2700K | -35K | 3500K |
| -30K | 3000K | -40K | 4000K |
| | | -50K | 5000K |

PROJECT
SPEC TYPE
NOTES

HOW TO ORDER:

CODE

Example:
NS-LL0125AC-I-S-D23-0-8-32W-80-27K-DIM-SW-CS-RE-NSAC-013111

NS-LL0125AC

8 DIMMING OPTION:

- STD Non-Dimmable
- DIM 1-10V

9 FIXTURE FINISH:


- SW Matt White
- SB Matt Black
- RAL Custom RAL on request*

* E.G. : RAL = #3020

10 CANOPY OPTIONS:



CS
cable
straight




CSS
central
standard

11 ADDITIONAL FEATURES:

- RE Remote Emergency
- OS Occupancy Sensor
- DS Daylight Sensor/Light Harvesting

* E.G. : RE = Remote Emergency

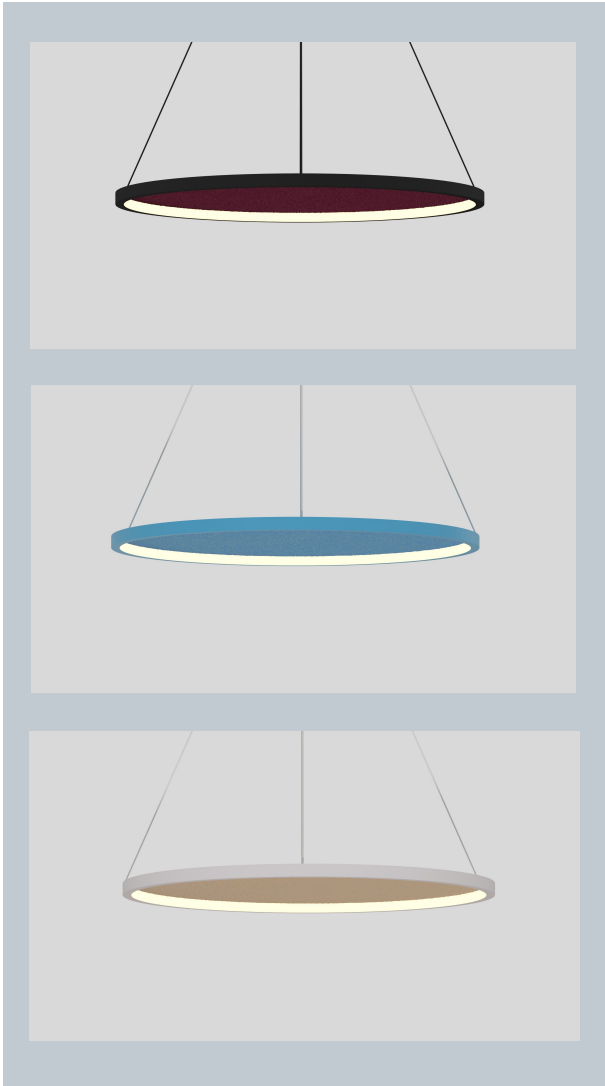

PROJECT
SPEC TYPE
NOTES

HOW TO ORDER:

CODE

Example:
NS-LL0125AC-I-S-D23-0-8-32W-80-27K-DIM-SW-CS-RE-NSAC-013111

NS-LL0125AC

12 ACOUSTIC COLORS:

- | | | |
|--|--|--|
|  -NSAC-001141 |  -NSAC-013111 |  -NSAC-025138 |
|  -NSAC-002122 |  -NSAC-018125 |  -NSAC-038127 |
|  -NSAC-003120 |  -NSAC-019126 |  -NSAC039143 |
|  -NSAC-004123 |  -NSAC-016104 |  -NSAC-028110 |
|  -NSAC-005107 |  -NSAC-017147 |  -NSAC-029112 |
|  -NSAC-006106 |  -NSAC-022119 |  -NSAC-042-146 |
|  -NSAC-007145 |  -NSAC-031108 |  -NSAC-043115 |
|  -NSAC-008129 |  -NSAC-020128 |  -NSAC-036105 |
|  -NSAC-009140 |  -NSAC-021130 |  -NSAC-033103 |
|  -NSAC-014144 |  -NSAC-034102 |  -NSAC-040124 |
|  -NSAC-011135 |  -NSAC-035101 |  -NSAC-044114 |
|  -NSAC-012133 |  -NSAC-024117 | |

