

CAPO IN SURFACE MOUNTED

(STANDARD GRADE)

BEAM IN







PROJECT			
SPEC TYPE			
NOTES			











GENERAL INFORMATION:

CAPO IN SURFACE MOUNTED - STANDARD GRADE offers a unparalleled value cost proposition in 4 standard sizes ranging from 24 to 60 inch diameters.

Indirect lighting from 2700K to 4000K.

Housing is full aluminum construction with both standard powder coating in black or white as well as custom RAL options. Complete Collection offers optional Emergency Back up kits, Motion, Occupancy, and Light harvesting control interfaces.

OPTICS:

PMMA lenses, Anti-UV Operation

FINISHING:

Matt White, Matt Black, custom on request

BODY:

Aluminum body construction.

VOLTAGE:

110-277V



LED

LIGHTING EFFICIENCY:

≥ 70 lm/w

IP RATING:

44

APPLIANCE CLASS:

ı



IP44

LED

WWW.BULLARDCOLLECTION.COM

Contact Us:







PROJECT SPEC TYPE **NOTES**













HOW TO ORDER:

CODE

NS-LL0125

-1

-M

-1-3

NS-LL0125-I-M-D24-1-3-32W-80-27K-DIM-SW-SF

LIGHT DISTRIBUTION:

-1 **INDIRECT**



2 INSTALLATION TYPE:

Surface Mounted

3 CIRCLE DIAMETER:

24" 48" -D24 -D48 -D36 36" -D60 60"

SIDE PROFILE HEIGHT:

-1-3 1.3"

POWER AND LIGHT EMISSION:

DIRECT LUMENS

CODE = WATTS | Ø

-32W 24" 2,240 lm -40W 36" 2,800 lm

-70W 48" 4,900 lm -80W 60" 5,600 lm

*E.G: 40W = 40 total Watts

LED CRI:

-80 **CRI 80**

-90 **CRI 90**

SPECIFY CCT:

-27K 2700K

-35K 3500K -30K -40K 4000K 3000K

WWW.BULLARDCOLLECTION.COM






Contact Us:



PROJECT

SPEC TYPE

NOTES

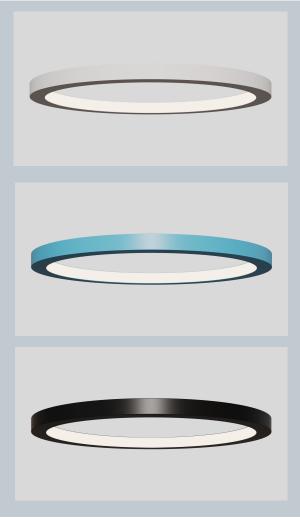

HOW TO ORDER:

CODE

8 DIMMING OPTION:

-STD Non-Dimmable

-DIM 1-10V

9 FIXTURE FINISH:

-SW Matt White

-SB Matt Black

-RAL Custom RAL on request*

* E.G. : RAL = #3020

10 CANOPY OPTIONS:

-SF

-SF surface mounted with remote driver

11 ADDITIONAL FEATURES:

-RE Remote Emergency

-OS Occupancy Sensor

-DS Daylight Sensor/Light Harvesting

* E.G. : RE = Remote Emergency











WWW.BULLARDCOLLECTION.COM





Contact Us: