




# CAPO OUT CHANDELIER (STANDARD GRADE)

BEAM OUT



PROJECT	
SPEC TYPE	
NOTES	

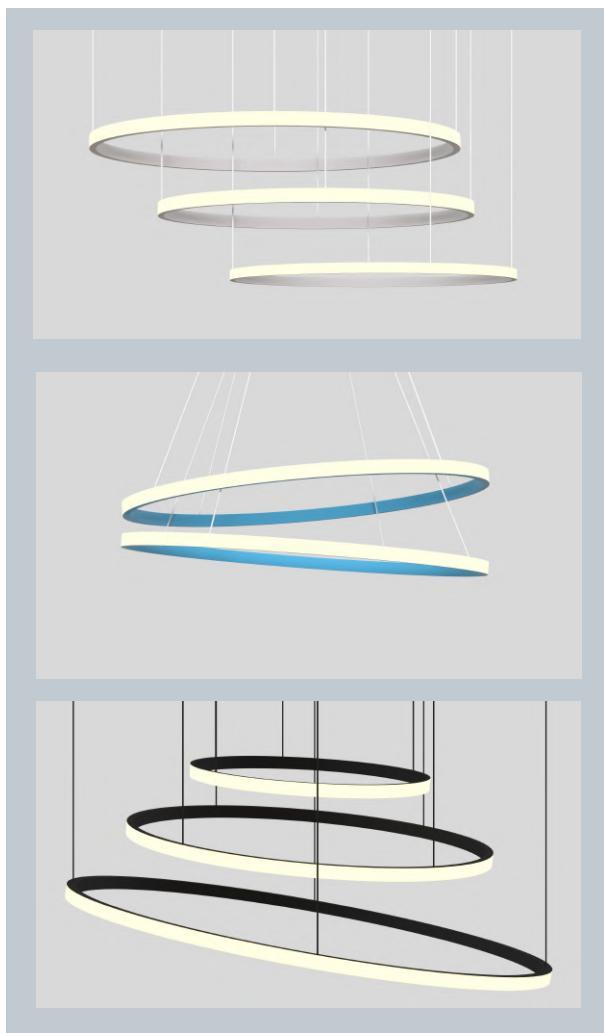

## GENERAL INFORMATION:

CAPO OUT CHANDELIER - STANDARD GRADE offers a unparalleled value cost proposition in 6 standard sizes ranging from 16 to 60 inch diameters. Indirect lighting from 2700K to 4000K . Offering two standard canopy and mounting options. Housing is full aluminum construction with both standard powder coating in black or white as well as custom RAL options. Complete Collection offers optional Emergency Back up kits, Motion, Occupancy, and Light harvesting control interfaces.

## OPTICS:

PMMA lenses, Anti-UV Operation

## FINISHING:

Matt White, Matt Black, custom on request

## BODY:

Aluminum body construction.

## VOLTAGE:

110-277V



## LIGHTING:

LED



## LIGHTING EFFICIENCY:

≥ 70 lm/w

## IP RATING:

44




## APPLIANCE CLASS:

I



PROJECT	
SPEC TYPE	
NOTES	

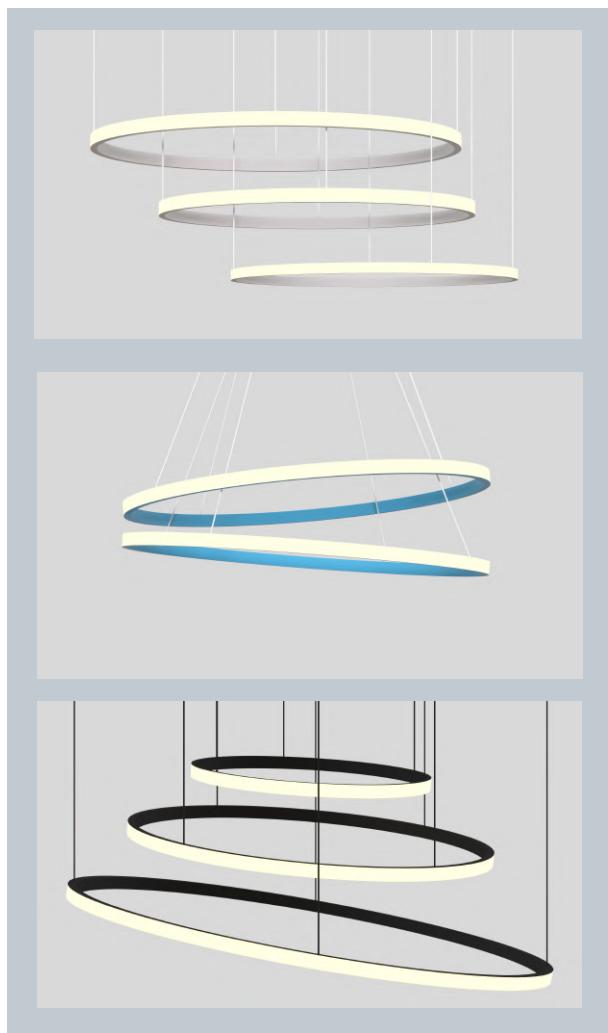

## HOW TO ORDER:

**CODE**

Example: NS-LL0207-D-S-D24-0-8-30W-80-27K-DIM-SW-CS NS-LL0208

1 **LIGHT DISTRIBUTION:** -D DIRECT 

2 **INSTALLATION TYPE:** -S Suspended

3 **CIRCLE DIAMETER:**

-D16	16"	-D48	48"
-D24	24"	-D60	60"
-D32	32"		
-D40	40"		

4 **SIDE PROFILE HEIGHT:** -0-8 0.8"

5 **POWER AND LIGHT EMISSION:**

CODE = WATTS | Ø DIRECT LUMENS


-20W	16"	1,400 lm
-30W	24"	2,100 lm
-40W	32"	2,800 lm
-50W	40"	3,500 lm
-60W	48"	4,200 lm
-80W	60"	5,600 lm

\*E.G.: 40W = 40 total Watts

6 **LED CRI:**  
-80 CRI 80  
-90 CRI 90

7 **SPECIFY CCT:**  
-27K 2700K -35K 3500K  
-30K 3000K -40K 4000K

PROJECT	
SPEC TYPE	
NOTES	

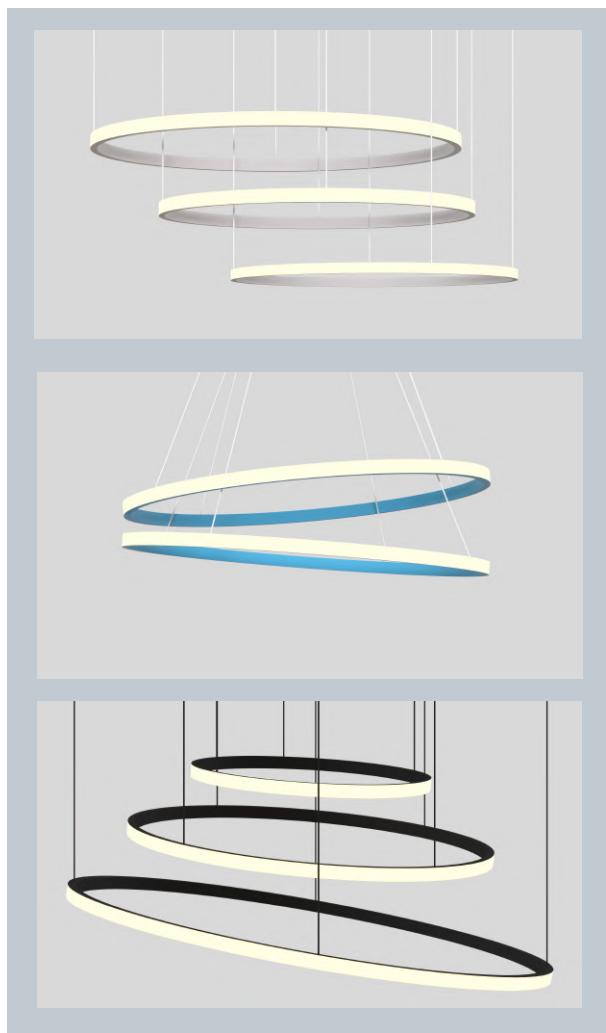

## HOW TO ORDER:

**CODE**

### 8 | DIMMING OPTION:


- STD Non-Dimmable
- DIM 1-10V

### 9 | FIXTURE FINISH:

- SW Matt White
- SB Matt Black
- RAL Custom RAL on request\*

\* E.G. : RAL = #3020

### 10 | CANOPY OPTIONS:



### 11 | ADDITIONAL FEATURES:


- RE Remote Emergency
- OS Occupancy Sensor
- DS Daylight Sensor/Light Harvesting

\* E.G. : RE = Remote Emergency

12

## CHANDELIER CONFIGURATIONS:


CAPO OUT circles may be ordered as separate circle pendants and/or in cluster configurations of two, three or five fixtures of various sizes, as well as custom clusters. (Consult factory for custom designs.)




C01.




C02.




C03.




C04.




C05.



C06.



C07.



C08.



C09.



C10.



C11.



C12.