




PROJECT

SPEC TYPE

NOTES

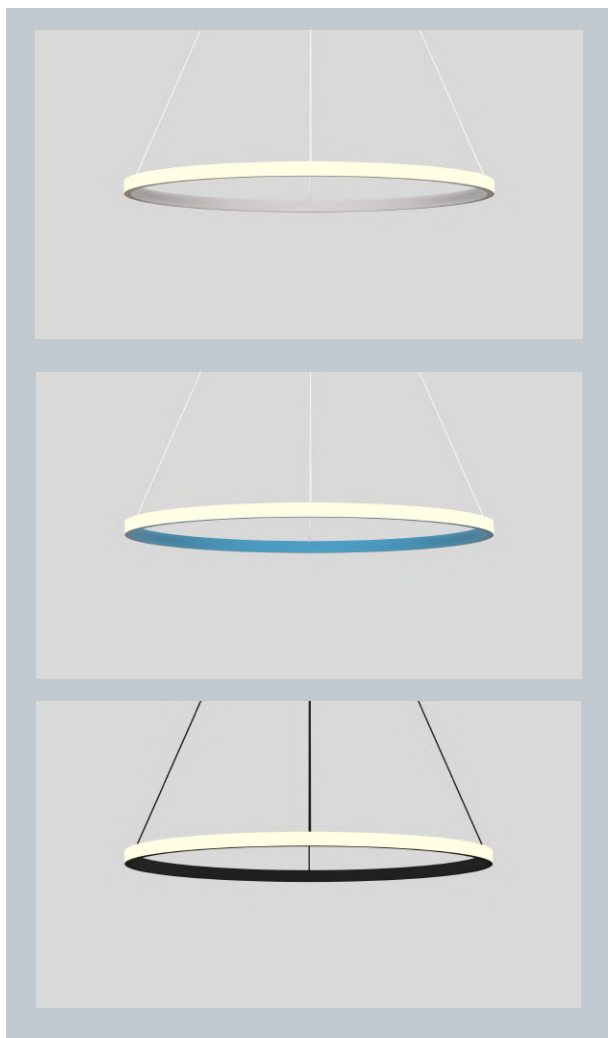

LED



IP44



GENERAL INFORMATION:

CAPO OUT SINGLE FIXTURE - STANDARD GRADE offers a unparalleled value cost proposition in 6 standard sizes ranging from 16 to 60 inch diameters. Direct lighting from 2700K to 4000K . Offering two standard canopy and mounting options. Housing is full aluminum construction with both standard powder coating in black or white as well as custom RAL options. Complete Collection offers optional Emergency Back up kits, Motion, Occupancy, and Light harvesting control interfaces.

OPTICS:

PMMA lenses, Anti-UV Operation

FINISHING:

Matt White, Matt Black, custom on request

BODY:

Aluminum body construction.

VOLTAGE:

110-277V



LIGHTING:

LED



LIGHTING EFFICIENCY:

≥ 70 lm/w

IP RATING:

44

IP44

APPLIANCE CLASS:

I



WWW.BULLARDCOLLECTION.COM

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS


Contact Us:

sales@gordonbullard.com

www.cerchiolighting.com

1 877-964-4646

PROJECT
SPEC TYPE
NOTES

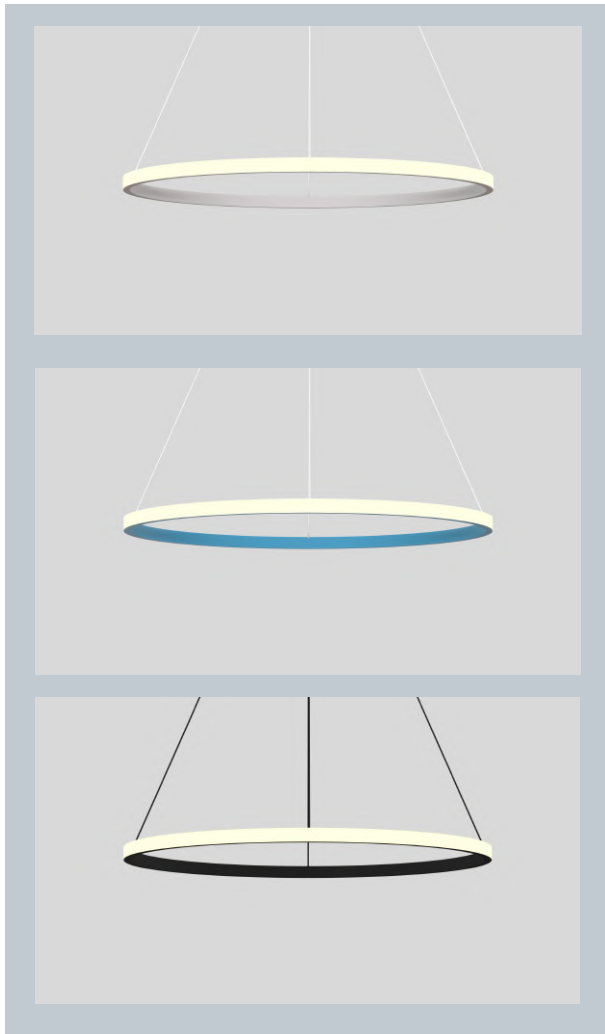

HOW TO ORDER:

CODE

Example:
NS-LL0208-D-S-D24-0-8-30W-80-27K-DIM-SW-CS

NS-LL0208

1 LIGHT DISTRIBUTION:

-D

-D DIRECT



2 INSTALLATION TYPE:

-S

-S Suspended

3 CIRCLE DIAMETER:

-D16	16"	-D48	48"
-D24	24"	-D60	60"
-D32	32"		
-D40	40"		

4 SIDE PROFILE HEIGHT:

-0-8

-0-8 0.8"

5 POWER AND LIGHT EMISSION:

CODE = WATTS | Ø

DIRECT LUMENS

-20W	16"	1,400 lm
-30W	24"	2,100 lm
-40W	32"	2,800 lm
-50W	40"	3,500 lm
-60W	48"	4,200 lm
-80W	60"	5,600 lm

*E.G : 40W = 40 total Watts

6 LED CRI:

-80 CRI 80
-90 CRI 90


7 SPECIFY CCT:

-27K	2700K	-35K	3500K
-30K	3000K	-40K	4000K

PROJECT

SPEC TYPE

NOTES

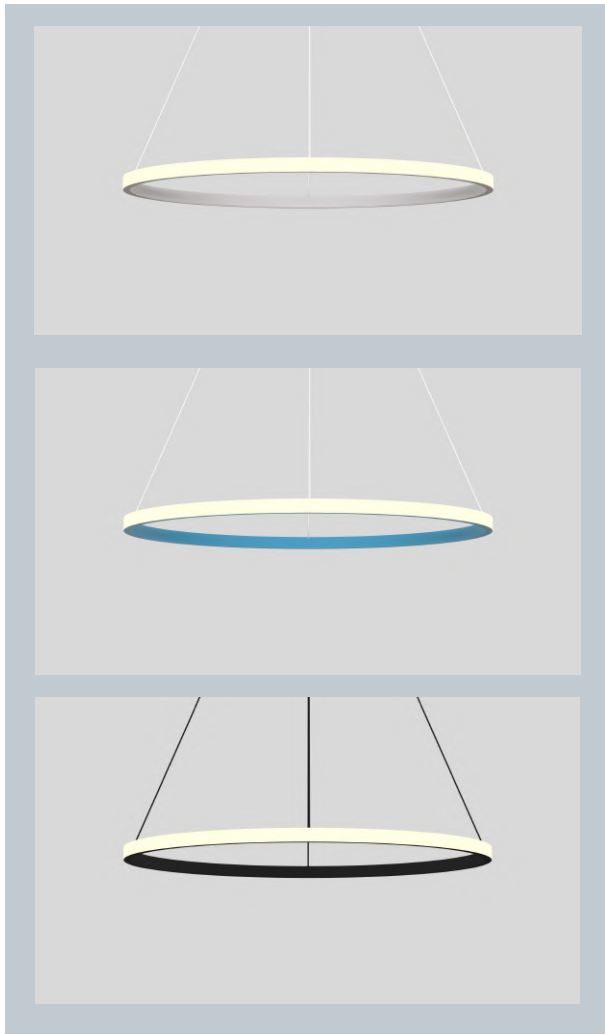

HOW TO ORDER:

CODE

8 DIMMING OPTION:

- STD Non-Dimmable
- DIM 1-10V

9 FIXTURE FINISH:


- SW Matt White
- SB Matt Black
- RAL Custom RAL on request*

* E.G. : RAL = #3020

10 CANOPY OPTIONS:



CS
cable
straight



CSS
central
standard

11 ADDITIONAL FEATURES:

- RE Remote Emergency
- OS Occupancy Sensor
- DS Daylight Sensor/Light Harvesting

* E.G. : RE = Remote Emergency