



PROJECT
SPEC TYPE
NOTES



GENERAL INFORMATION:

CAPO IN SPIN - STANDARD GRADE offers a unparalleled value cost proposition in 2 standard sizes ranging from 32 to 34 inch diameters. Indirect lighting 3000K . Offering two standard canopy and mounting options. Housing is full aluminum construction with both standard powder coating in black or white as well as custom RAL options. Complete Collection offers optional Emergency Back up kits, Motion, Occupancy, and Light harvesting control interfaces.

OPTICS:

PMMA lenses, Anti-UV Operation

FINISHING:

Matt White, Matt Black, custom on request

BODY:

Aluminum body construction.

VOLTAGE:

110-277V



LIGHTING:

LED



LIGHTING EFFICIENCY:

≥ 80lm/w

IP RATING:

44




APPLIANCE CLASS:

I



PROJECT	
SPEC TYPE	
NOTES	

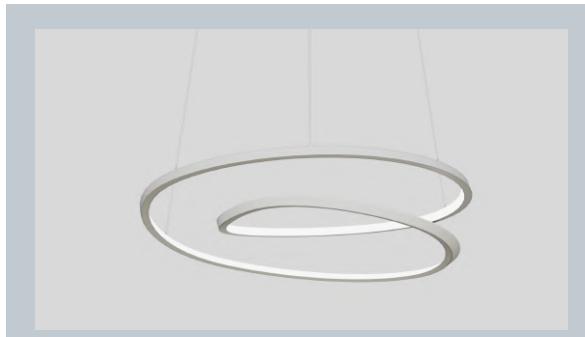

HOW TO ORDER:

CODE

Example:
P-14-I-S-D32-1-5-58W-80-30K-DIM-SW-CS-RE

P-14

1 LIGHT DISTRIBUTION:

-I INDIRECT



2 INSTALLATION TYPE:

-S Suspended

-S

3 CIRCLE DIAMETER:

-D32 32"

-D34 34"

-1-5

4 SIDE PROFILE HEIGHT:

-1-5 1,5"

5 POWER AND LIGHT EMISSION:

CODE = WATTS | Ø DIRECT LUMENS

-58W 32" 4,640 lm

-62W 34" 4,960 lm

*E.G.: 58W = 48 total Watts

6 LED CRI:

-80 CRI 80

-90 CRI 90

7 SPECIFY CCT:

-30K 3000K

-40K 4000K

PROJECT	
SPEC TYPE	
NOTES	



HOW TO ORDER:

CODE

8 | DIMMING OPTION:


- STD Non-Dimmable
- DIM 1-10V

9 | FIXTURE FINISH:

- SW Matt White
- SB Matt Black
- RAL Custom RAL on request*

* E.G.: RAL = #3020

10 | CANOPY OPTIONS:

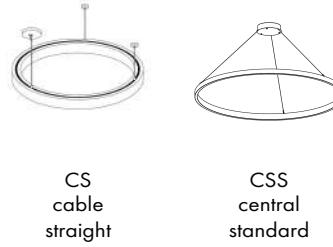

11 | ADDITIONAL FEATURES:

- RE Remote Emergency
- OS Occupancy Sensor
- DS Daylight Sensor/Light Harvesting

* E.G.: RE = Remote Emergency