


BEAM DOWN



| | |
|-----------|--|
| PROJECT | |
| SPEC TYPE | |
| NOTES | |

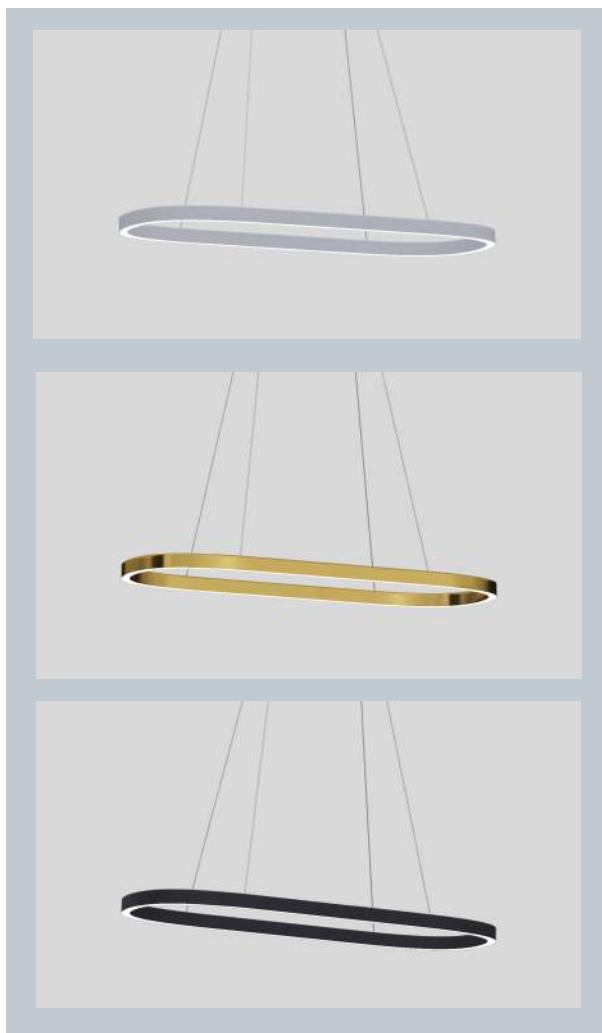

WWW.BULLARDCOLLECTION.COM

OUTDOOR
TECHNICAL
DECORATIVE




WE WELCOME ALL CUSTOM ORDERS

Contact Us:

sales@gordonbullard.com
www.cerchiolighting.com
1 877-964-4646
Updated 01/14/2024

| | |
|-----------|--|
| PROJECT | |
| SPEC TYPE | |
| NOTES | |

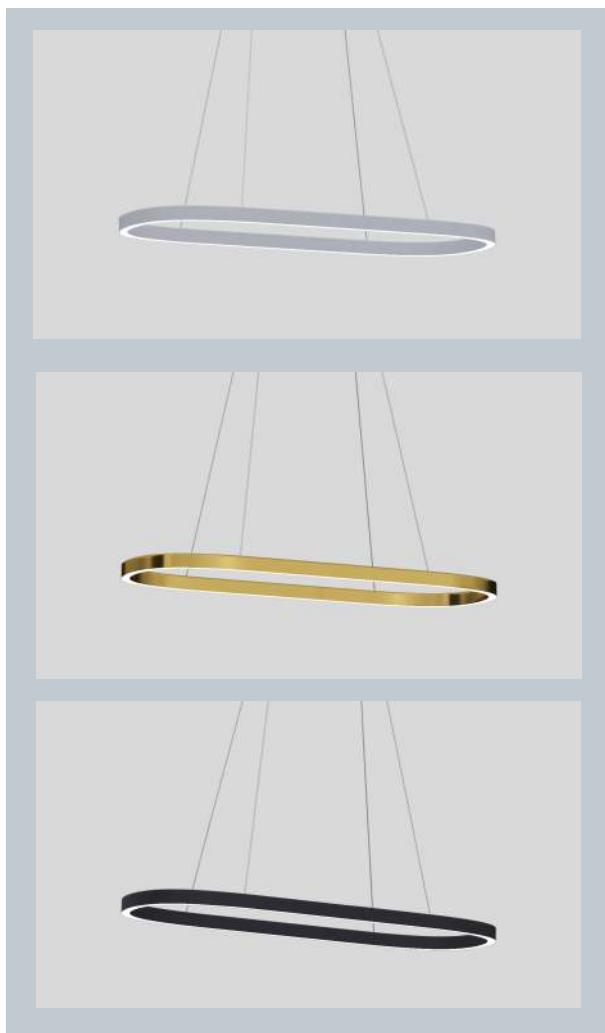

HOW TO ORDER:

CODE

Example: LY-003-I-S-D32-2-5-30W-80-27K-DIM-SW-CS LY-003

1 **LIGHT DISTRIBUTION:** -I INDIRECT 

2 **INSTALLATION TYPE:** -S Suspended 

3 **DIMENSIONS:** -SC Width: 11.8" - Length: 32" 

-MC Width: 15.7" - Length: 40" 

-LC Width: 15.7" - Length: 48" 

4 **SIDE PROFILE HEIGHT:** -2-5 2.5" 

5 **POWER AND LIGHT EMISSION:** 

CODE = WATTS | Ø DIRECT LUMENS

-30W 32" 2,400 lm

-35W 40" 2,800 lm

-40W 48" 3,200 lm


*E.G.: 30W = 30 total Watts

6 **LED CRI:** -80 CRI 80 

-90 CRI 90 

7 **SPECIFY CCT:** -30K 3000K -40K 4000K 

| | |
|-----------|--|
| PROJECT | |
| SPEC TYPE | |
| NOTES | |

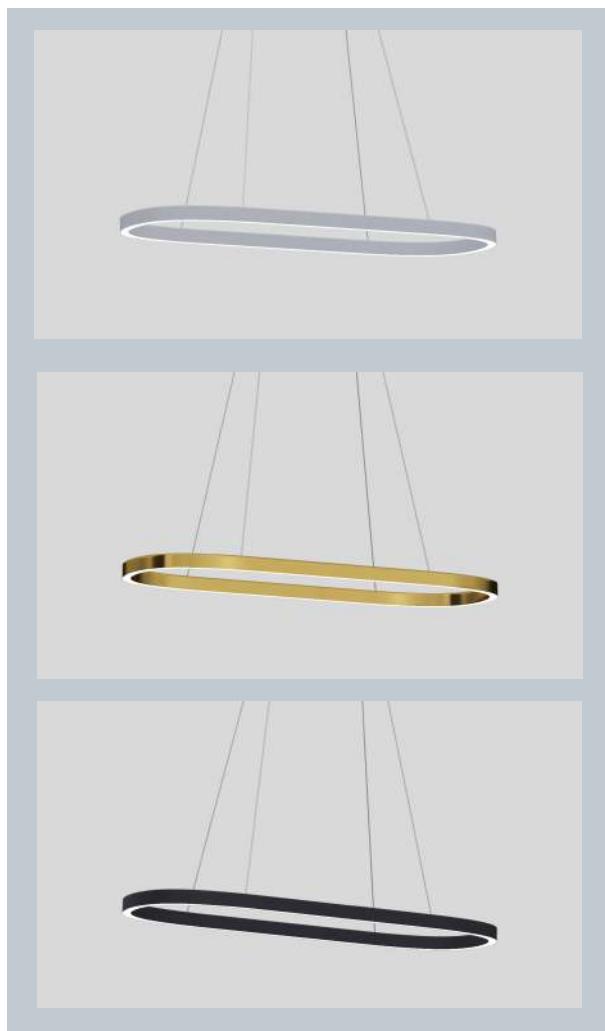

HOW TO ORDER:

CODE

8 | DIMMING OPTION:

- STD Non-Dimmable
- DIM 1-10V

9 | FIXTURE FINISH:

- SW Matt White
- SB Matt Black
- GL Shiny Gold

10 | CANOPY OPTIONS:



CS
cable
straight

CSS
central
standard

11 | ADDITIONAL FEATURES:

- RE Remote Emergency
- OS Occupancy Sensor
- DS Daylight Sensor/Light Harvesting

* E.G.: RE = Remote Emergency