




FRUIT 1 SINGLE FIXTURE (STANDARD GRADE)

BEAM DOWN



PROJECT	
SPEC TYPE	
NOTES	

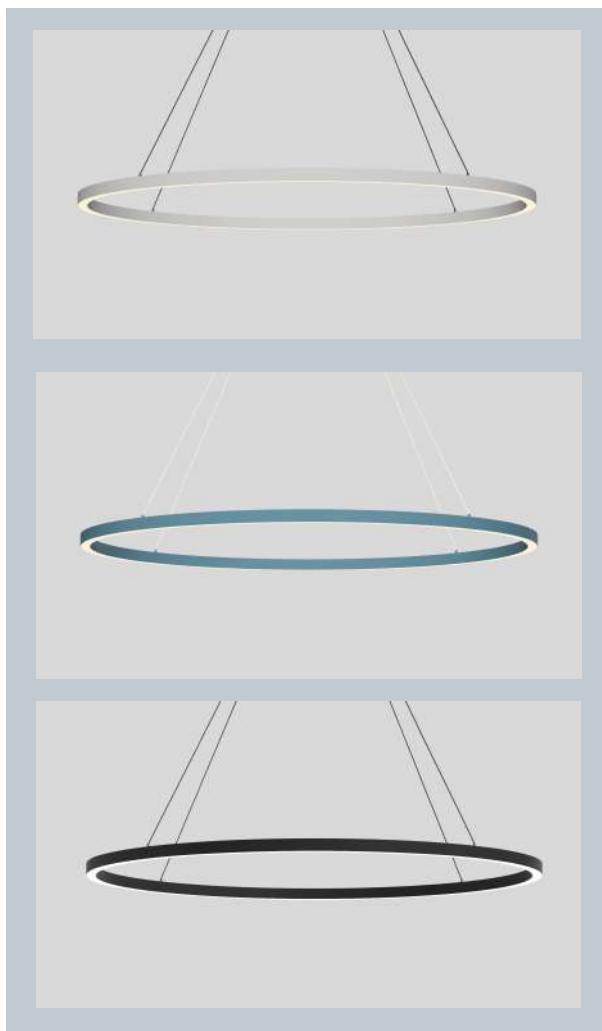

GENERAL INFORMATION:

FRUIT 1 SINGLE FIXTURE - STANDARD GRADE offers a unparalleled value cost proposition in 7 standard sizes ranging from 23.6 to 196.9 inch diameters. Direct lighting from 2700K to 4000K . Offering two standard canopy and mounting options. Housing is full aluminum construction with both standard powder coating in black or white as well as custom RAL options. Complete Collection offers optional Emergency Back up kits, Motion, Occupancy, and Light harvesting control interfaces.

OPTICS:

PMMA lenses, Anti-UV Operation

FINISHING:

Matt White, Matt Black, custom on request

BODY:

Aluminum body construction

VOLTAGE:

110-277V



LIGHTING:

LED



LIGHTING EFFICIENCY:

≥ 85 lm/w

IP RATING:

44



APPLIANCE CLASS:

I



PROJECT	
SPEC TYPE	
NOTES	



HOW TO ORDER:

CODE

Example:
NS-LL0113-D-S-D24-1-5-40W-80-27K-DIM-SW-CS

NS-LL0113

1 LIGHT DISTRIBUTION:

-D

-D DIRECT



2 INSTALLATION TYPE:

-S

-S Suspended

3 CIRCLE DIAMETER:

-D24 24" -D79 79" -D197 197"

-D36 36" -D98 98"

-D48 48" -D119 119"

-D60 60" -D158 158"

4 SIDE PROFILE HEIGHT:

-1-5 1.5"

5 POWER AND LIGHT EMISSION:

CODE = WATTS | Ø

DIRECT LUMENS

-40W	23.6"	3,400 lm
-50W	35.4"	4,250 lm
-80W	47.2"	6,800 lm
-100W	59.1"	8,500 lm
-120W	78.8"	10,200 lm
-160W	98.4"	13,600 lm
-200W	118.1"	17,000 lm
-300W	157.5"	25,500 lm
-400W	196.9"	34,000 lm

*E.G : 40W = 40 total Watts

6 LED CRI:

-80 CRI 80


-90 CRI 90

7 SPECIFY CCT:

-27K 2700K -35K 3500K

-30K 3000K -40K 4000K

PROJECT	
SPEC TYPE	
NOTES	

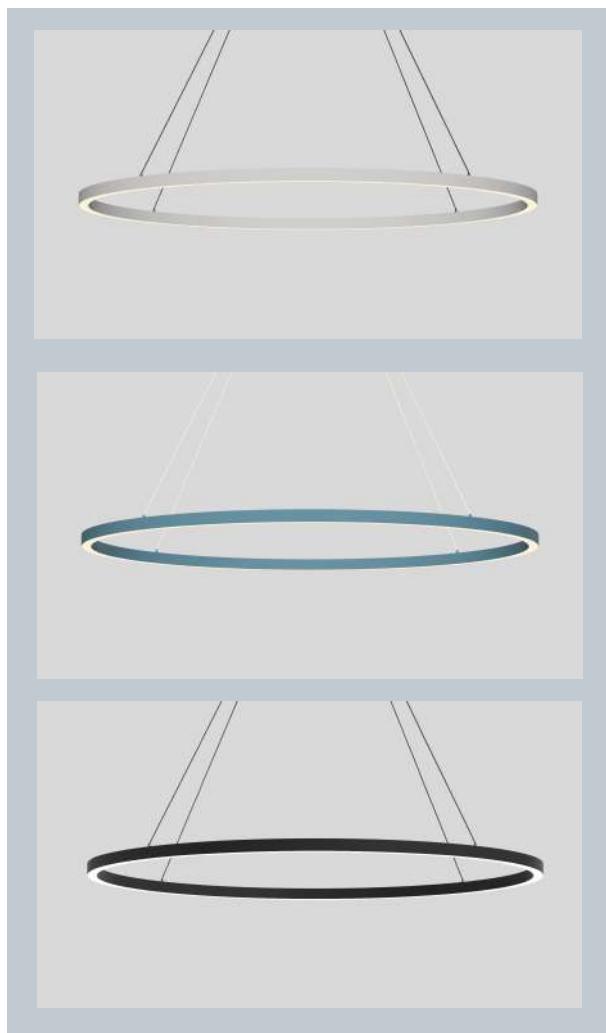

HOW TO ORDER:

CODE

8 | DIMMING OPTION:


- STD Non-Dimmable
- DIM 0-10V

9 | FIXTURE FINISH:

- SW Matt White
- SB Matt Black
- RAL Custom RAL on request*

* E.G. : RAL = #3020

10 | CANOPY OPTIONS:



11 | ADDITIONAL FEATURES:

- RE Remote Emergency
- OS Occupancy Sensor
- DS Daylight Sensor/Light Harvesting

* E.G. : RE = Remote Emergency