




PROJECT
SPEC TYPE
NOTES

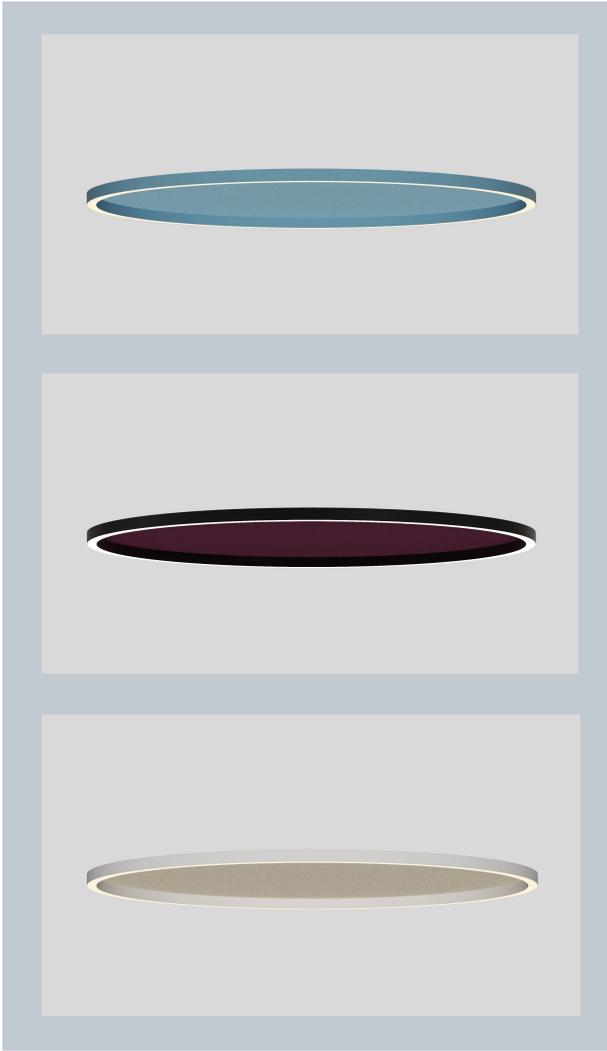

GENERAL INFORMATION:

Introducing FRUIT 1 ACOUSTIC SURFACE MOUNTED: Elevate Your Lighting Experience. Discover the innovative FRUIT 1 ACOUSTIC SURFACE MOUNTED circle light, available in acoustic lighting options. Choose from two elegant color finishes (black and white), with customization possible. Enjoy efficient operation with AC 110-277V voltage and select 0-10v dimming or non-dimmable options. With an impressive selection of 38 acoustic felt colors, you can create a space that resonates with both light and sound. FRUIT 1 ACOUSTIC SURFACE MOUNTED offers a unparalleled value cost proposition in 9 standard sizes ranging from 23 to 196 inch diameters. Lighting from 2700K to 5000K.

OPTICS:

PMMA lenses, Anti-UV Operation

FINISHING:

Matt White, Matt Black, custom on request

BODY:

Aluminum body construction.

VOLTAGE:

110-277V



LIGHTING:

LED



LIGHTING EFFICIENCY:

≥ 85 lm/w

IP RATING:

44




APPLIANCE CLASS:

I



PROJECT
SPEC TYPE
NOTES

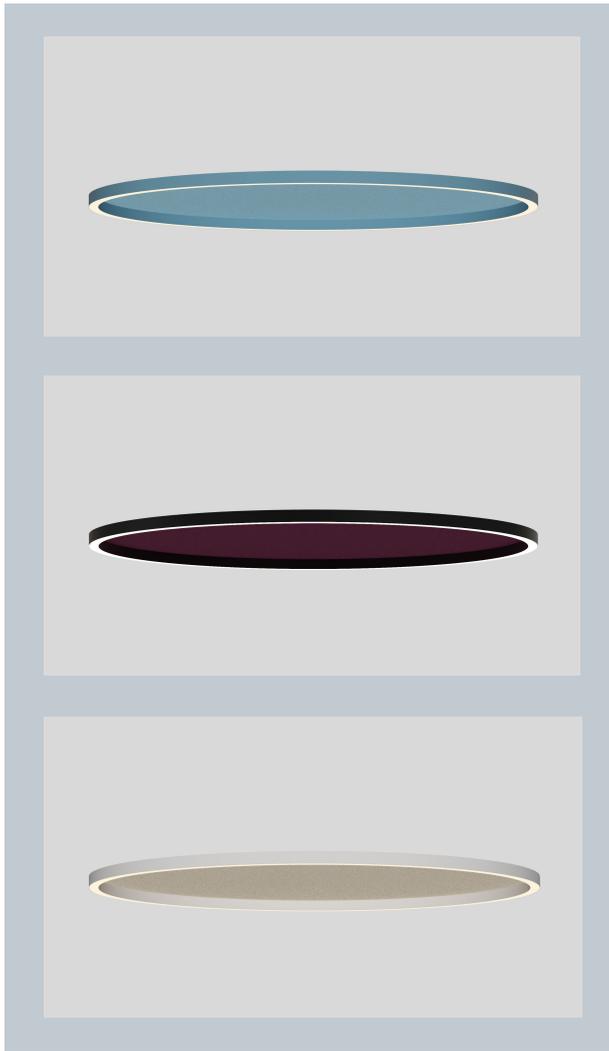

HOW TO ORDER:

CODE

Example: NS-LL0113AC-D-SM-D23-0-8-40W-80-27K-DIM-SW-RE-NSAC-018125 NS-LL0113AC

1 LIGHT DISTRIBUTION: -D

-D Direct



2 INSTALLATION TYPE: -SM

-SM Surface Mounted

3 CIRCLE DIAMETER:

CODE = RING DIAMETER

CODE = RING DIAMETER

-D23 23.6" (60cm)

-D98 98.4" (250cm)

-D35 35.4" (90cm)

-D118 118.1" (300cm)

-D47 47.2" (120cm)

-D157 157.5" (400cm)

-D59 59.1" (150cm)

-D196 196.9" (500cm)

-D78 78.7" (200cm)

4 SIDE PROFILE HEIGHT: -0-8

-0-8 0.8"

5 POWER AND LIGHT EMISSION:

CODE = WATTS | Ø

DIRECT LUMENS

CODE = WATTS | Ø

DIRECT LUMENS

-40W 23" 3,400lm

-160W 98" 13,600 lm

-50W 35" 4,250 lm

-200W 118" 17,000 lm

-80W 47" 6,800 lm

-300W 157" 25,500 lm

-100W 59" 8,500 lm

-400W 196" 34,000 lm

-120W 78" 10,200 lm

*E.G : 40W = 40 total Watts

6 LED CRI:

-80 CRI 80

-90 CRI 90

7 SPECIFY CCT:

-27K 2700K

-35K 3500K

-30K 3000K

-40K 4000K

-50K 5000K

PROJECT
SPEC TYPE
NOTES

HOW TO ORDER:

CODE

Example: NS-LL0113AC-D-SM-D23-0-8-40W-80-27K-DIM-SW-RE-NSAC-018125 NS-LL0113AC

8 DIMMING OPTION:

- STD Non-Dimmable
- DIM 1-10V

9 FIXTURE FINISH:


- SW Matt White
- SB Matt Black
- RAL Custom RAL on request*

* E.G. : RAL = #3020

10 ADDITIONAL FEATURES:

- RE Remote Emergency
- OS Occupancy Sensor
- DS Daylight Sensor/Light Harvesting

* E.G. : RE = Remote Emergency

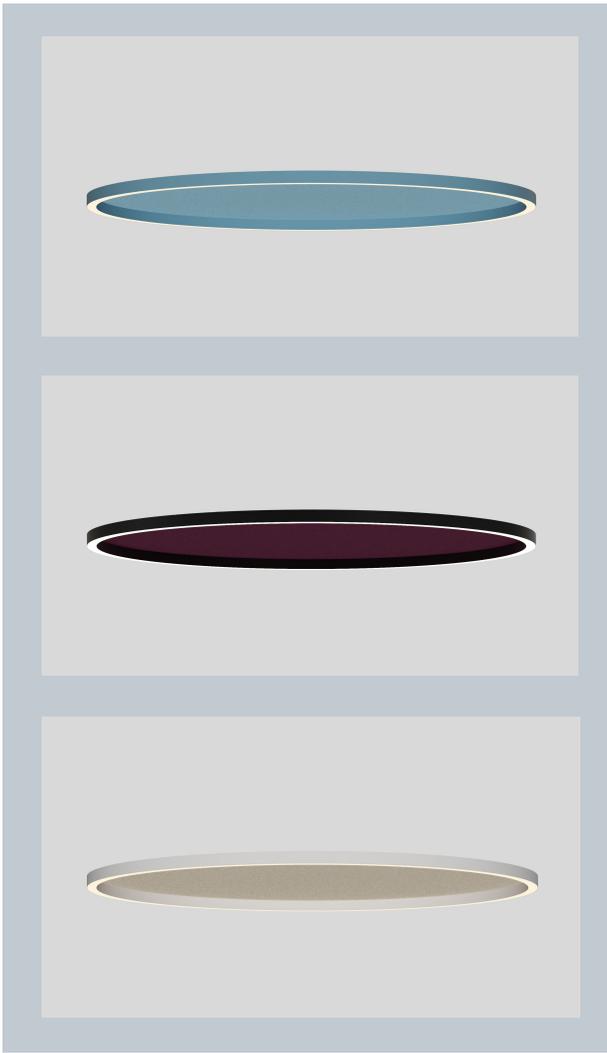

PROJECT
SPEC TYPE
NOTES

HOW TO ORDER:

CODE

Example:
NS-LL0113AC-D-SM-D23-0-8-40W-80-27K-DIM-SW-RE-NSAC-018125

NS-LL0113AC

11 ACOUSTIC COLORS:

- | | | |
|--|--|--|
|  -NSAC-001141 |  -NSAC-013111 |  -NSAC-025138 |
|  -NSAC-002122 |  -NSAC-018125 |  -NSAC-038127 |
|  -NSAC-003120 |  -NSAC-019126 |  -NSAC039143 |
|  -NSAC-004123 |  -NSAC-016104 |  -NSAC-028110 |
|  -NSAC-005107 |  -NSAC-017147 |  -NSAC-029112 |
|  -NSAC-006106 |  -NSAC-022119 |  -NSAC-042-146 |
|  -NSAC-007145 |  -NSAC-031108 |  -NSAC-043115 |
|  -NSAC-008129 |  -NSAC-020128 |  -NSAC-036105 |
|  -NSAC-009140 |  -NSAC-021130 |  -NSAC-033103 |
|  -NSAC-014144 |  -NSAC-034102 |  -NSAC-040124 |
|  -NSAC-011135 |  -NSAC-035101 |  -NSAC-044114 |
|  -NSAC-012133 |  -NSAC-024117 | |

