




# FRUIT 1 MAMBO JUMBO SINGLE FIXTURE (STANDARD GRADE)

BEAM DOWN



PROJECT	
SPEC TYPE	
NOTES	

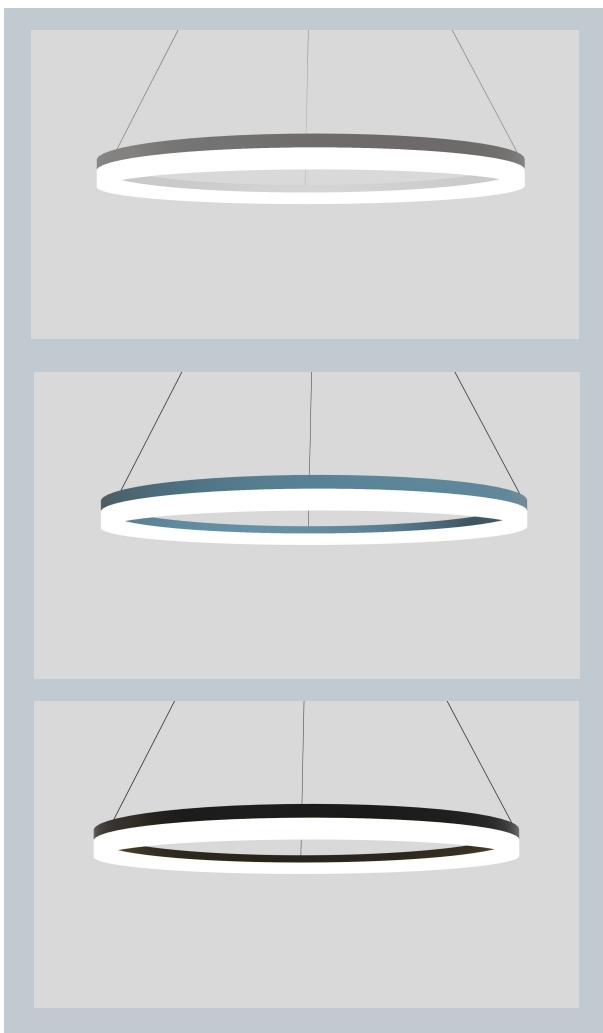

## GENERAL INFORMATION:

FRUIT 1 MAMBO JUMBO - STANDARD GRADE provides an unmatched value cost proposition in 6 standard sizes, ranging from 16 to 60 inches in diameter. It features direct lighting with color temperature options ranging from 3000K to 5000K. The fixture comes with two standard canopy and mounting options. The housing is constructed with full aluminum, offering standard powder coating in black or white, along with customizable RAL options. The comprehensive collection also includes optional Emergency Backup kits, Motion, Occupancy, and Light Harvesting control interfaces.

## OPTICS:

PMMA lenses, Anti-UV Operation

## FINISHING:

Matt White, Matt Black, custom on request

## BODY:

Aluminum body construction

## VOLTAGE:

110-277V



## LIGHTING:

LED



## LIGHTING EFFICIENCY:

≥ 70 lm/w

## IP RATING:

44




## APPLIANCE CLASS:

I



PROJECT	
SPEC TYPE	
NOTES	

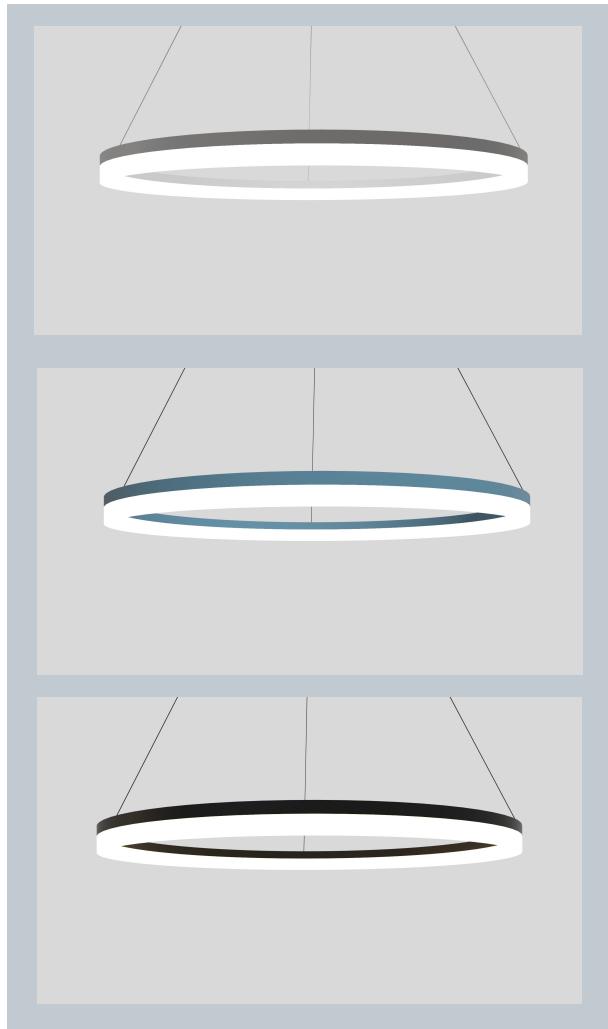

## HOW TO ORDER:

**CODE**

Example: NS-LL0203-D-S-D24-2-8-40W-80-27K-DIM-SW-CS

NS-LL0203

### 1 LIGHT DISTRIBUTION:

-D

-D DIRECT



### 2 INSTALLATION TYPE:

-S

-S Suspended

### 3 CIRCLE DIAMETER:

-D16 16" -D48 48"

-D24 24" -D60 60"

-D32 32"

-D40 40"

### 4 SIDE PROFILE HEIGHT:

-2-8

-2-8 2.8"

### 5 POWER AND LIGHT EMISSION:

CODE = WATTS | Ø

DIRECT LUMENS

-15W	16"	1,050 lm
-25W	24"	1,750 lm
-35W	32"	2,450 lm
-45W	40"	3,150 lm
-50W	48"	3,500 lm
-60W	60"	4,200 lm

\*E.G.: 45W = 45 total Watts

### 6 LED CRI:

-80 CRI 80


-90 CRI 90

### 7 SPECIFY CCT:

-27K 2700K -35K 3500K

-30K 3000K -40K 4000K

PROJECT	
SPEC TYPE	
NOTES	

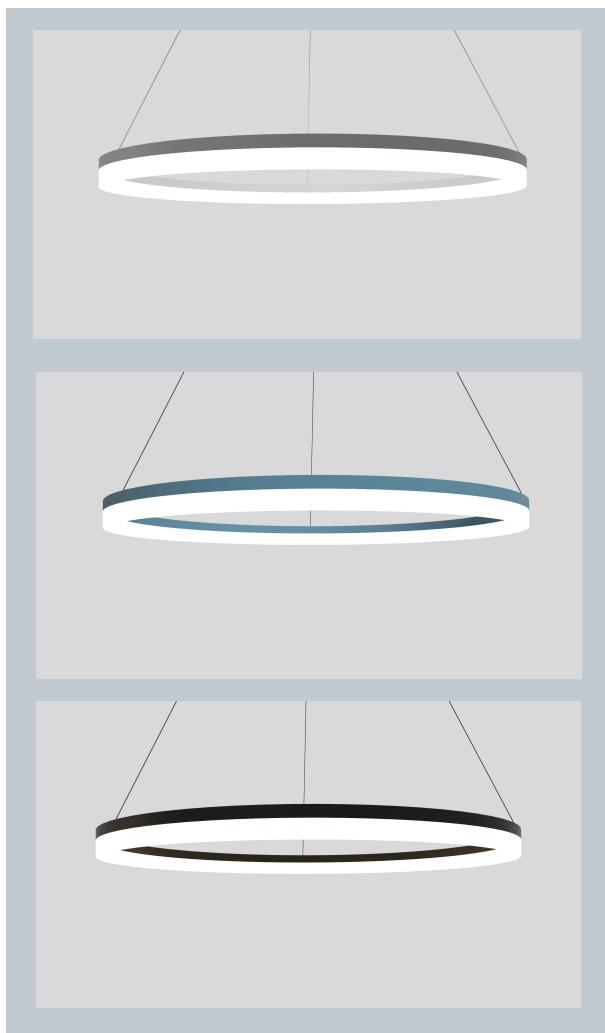

## HOW TO ORDER:

**CODE**

### 8 | DIMMING OPTION:


- STD Non-Dimmable
- DIM 1-10V

### 9 | FIXTURE FINISH:

- SW Matt White
- SB Matt Black
- RAL Custom RAL on request\*

\* E.G. : RAL = #3020

### 10 | CANOPY OPTIONS:



### 11 | ADDITIONAL FEATURES:

- RE Remote Emergency
- OS Occupancy Sensor
- DS Daylight Sensor/Light Harvesting

\* E.G. : RE = Remote Emergency