

360 BEAM



PROJECT

SPECTYPE

NOTES



LED



IP20



GENERAL INFORMATION:

Our Acrylic Tube LED Linear Light boasts a sleek and modern design, with an elegant acrylic tube that enhances the visual appeal of any space.

The linear light technology ensures uniform and efficient lighting coverage, eliminating shadows and creating a bright and inviting atmosphere.

With its advanced LED technology, this pendant light offers high energy efficiency and long lifespan, making it an excellent choice for commercial and industrial applications.

MATERIAL:

Aluminum + PMMA

OPTICS:

Lowe glare optic PMMA tubes

RING FINISHING:

Satin Black (RAL 9005), Satin Gold (RAL 1036)



VOLTAGE:

110-277V



LIGHT SOURCE:

LED



IP RATING:

IP 20



APPLIANCE CLASS:

II



OPERATING TEMPERATURE:

-40 C° ~ +60 C°

POWER SUPPLY:

Flickering free power supply, short circuit and over voltage protection

CERCHIO = CIRCLE

sales@gordonbullard.com

www.cerchiolighting.com

1-877-964-4646



991 South Gull Lake Dr



Richland, MI 49083

USA

PROJECT

SPECTYPE

NOTES

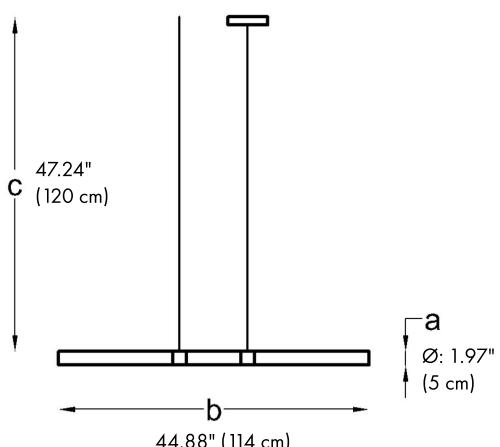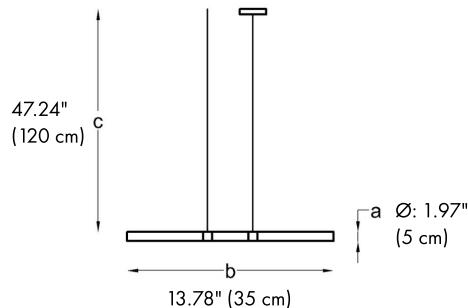

LED



IP20



sales@gordonbullard.com

www.cerchiolighting.com

1-877-964-4646

CERCHIO = CIRCLE



991 South Gull Lake Dr
Richland, MI 49083
USA

CODE:

AP-3-H-35-10W-
30K-DIM-RAL 9005

HOW TO ORDER:

Example:

CODE: AP-3-H-35-10W-30K-DIM-RAL 9005

1

DIMENSIONS:

-35

- A) Diameter - Ø: 1.97" (5 cm)
- B) Length - L: 13.78" (35 cm)
- C) Cable - H: 47.24" (120 cm)

-120

- A) Diameter - Ø: 1.96" (5 cm)
- B) Length - L: 44.88" (114 cm)
- C) Cable - H: 47.24" (120 cm)

2

LIGHT SOURCE:

- 10W LED / 10W / 1000 lm / CRI 80
- 30W LED / 30W / 3000 lm / CRI 80

for -35 model*

for -120 model*

3

COLOR TEMPERATURE:

- 30K 3000K
- 40K 4000K
- 60K 6000K

4

DIMMING OPTIONS:

- NON Non-Dimmable
- DIM 0-10V

5

RING FINISHING:

- RAL 9005 Satin Black
- RAL 1036 Satin Gold