

MAGNOLIA LUX (PENDANT)



PROJECT

SPECTYPE

NOTES



GENERAL INFORMATION:

Magnolia LUX is a contemporary geometric pendant system that merges clean architectural lines with natural biophilic accents. Its illuminated square and rectangular frames are crafted from a sleek metal body with opaline silicone optics, delivering even, direct LED illumination with high efficacy (≥ 60 lm/W). Available in multiple sizes, lumen packages, CCT options, and dimming systems including 0–10V, DALI, Casambi, and Lutron, it offers exceptional design flexibility for commercial, hospitality, and modern residential spaces.

OPTICS:

Opaline-finish Silicone

FINISHING:

Matt White, Matt Black, custom on request

BODY:

Metal body construction

VOLTAGE:

110-277V



LIGHTING:

LED



LIGHTING EFFICIENCY:

≥ 60 lm/w

IP RATING:

IP 20



APPLIANCE CLASS:

I

PROFILE WIDTH:

2"

LIGHT DISTRIBUTION:

DIRECT

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.cerchiolighting.com

1-877-964-4646

PROJECT

SPECTYPE

NOTES

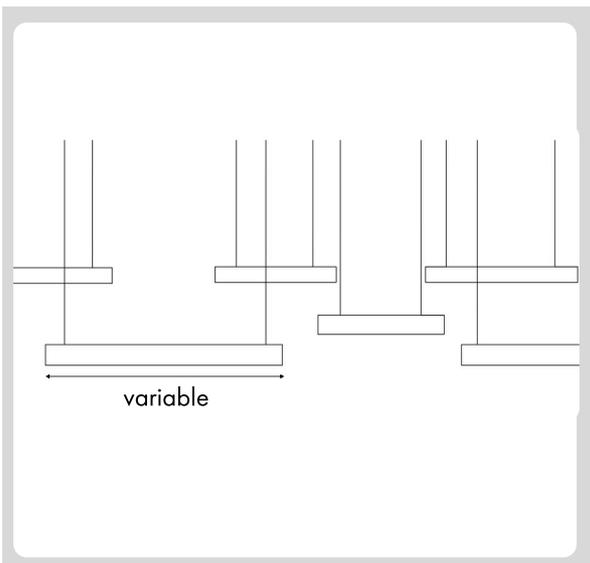

HOW TO ORDER:

Example:
CODE: CH-LMNGLX-GLC-BT-S24-80-27K-DIM-BL -BL-CS-RE

CODE:

CH-LMNGLX-GLC-BT-S24-80-27K-DIM-BL -BL-CS-RE

1

MODELS:

-S24

- A) Length - L: 24" (60.96 cm)
- B) Width - W: 24" (60.96 cm)
- C) Height - H: 2.5" (6.35 cm)

LIGHT SOURCE:

LED / 110-277V / 26W / 2,166 lm

-S42

- A) Length - L: 42" (106.68 cm)
- B) Width - W: 42" (106.68 cm)
- C) Height - H: 2.5" (6.35 cm)

LIGHT SOURCE:

LED / 110-277V / 45W / 3,735 lm

-S60

- A) Length - L: 60" (152.4 cm)
- B) Width - W: 60" (152.4 cm)
- C) Height - H: 2.5" (6.35 cm)

LIGHT SOURCE:

LED / 110-277V / 65W / 5,416 lm

-S60

- A) Length - L: 72" (182.88 cm)
- B) Width - W: 72" (182.88 cm)
- C) Height - H: 2.5" (6.35 cm)

LIGHT SOURCE:

LED / 110-277V / 78W / 6,500 lm

OUTDOOR

TECHNICAL

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.cerchiolighting.com

1-877-964-4646

PROJECT

SPECTYPE

NOTES



HOW TO ORDER:	CODE:
<p>Example: CODE: CH-LMNGLX-GLC-BT-S24-80-27K-DIM-BL -BL-CS-RE</p>	<p>CH-LMNGLX-GLC-BT-S24-80-27K-DIM-BL -BL-CS-RE</p>
<p>2 LED CRI:</p> <p>-80 CRI 80 -90 CRI 90</p>	
<p>3 SPECIFY CCT:</p> <p>-27K 2700K -30K 3000K -40K 4000K</p>	
<p>4 DIMMING OPTIONS:</p> <p>-NON Non-Dimmable -DIM 0-10V -DALI DALI -CAS Casambi -LUT Lutron</p>	
<p>5 BODY FINISH:</p> <p>-WH White -BL Black -CUS Custom RAL on request</p>	
<p>6 CANOPY FINISH OPTIONS:</p> <p>-WH White -BL Black -CUS Custom RAL on request</p>	
<p>7 CANOPY OPTIONS:</p> <p>-CS Cable straight -CSS Central standard</p>	
<p>8 OPTIONAL CONTROL FEATURES:</p> <p>-RE Remote Emergency -OS Occupancy Sensor -DS Daylight Sensor/Light Harvesting</p>	

OUTDOOR
TECHNICAL
DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:
sales@gordonbullard.com
www.cerchiolighting.com
1-877-964-4646